
kuiperlumen

DISPLAY AND DIGITAL SIGNAGE

Product Brochure



Contents

- 01 Industries
- 03 Update Methods
- 06 Solutions

Advertising Displays

- 07 Android Advertising Displays
- 11 Android Freestanding Digital Posters

Narrow Bezel Android Displays

- 15 Network Digital Menu Boards
- **19** High Vibrance Android Advertising Displays

Professional Monitors & LCD Video Wall Displays

- 23 Professional Monitors
- 27 4K Large Format Displays
- 31 LCD Video Wall Displays

Window Displays


- 35 High Brightness Monitors
- **39** Ultra High Brightness Monitors
- 43 Digital Rod Displays
- 47 Hanging Double-Sided Window Displays

Outdoor Displays

- 51 Outdoor Advertising Displays
- 55 Outdoor Digital Posters





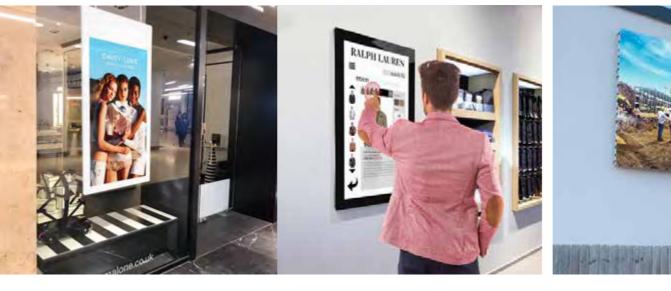

Battery Displays

- 59 Outdoor Digital Android Battery A-Boards
- 63 Digital Android Battery A-Boards

Touch Screens

- 67 PCAP Touch Screens
- 71 PCAP Touch Screen Kiosks
- 75 Infrared Freestanding Touch Screen Posters
- 79 4K Slim Bezel Interactive Touch Displays

POS Displays

83 POS Android Advertising Displays

Stretched Displays

- 87 Ultra Wide Stretched Displays
- 91 LCD Shelf Edge Displays

LED Video Walls

- 93 Welcome to the World of LED
- 97 Indoor LED Video Walls
- 101 Outdoor LED Video Walls
- **105** Fine Pitch LED Presentation Video Walls

Media Players

- **109** Standalone Android Media Players
- 111 Android Cloud Network Media Players

Digital Signage Software

- 115 Network CMS
- 119 Touch Screen CMS





Retail

The retail sector is by far the most popular area for Digital Signage and is a competitive battleground with shops all fighting to grab customers' attention. When compared to static signage Digital Signage captures 400% more views¹. Most of our Digital Signage solutions can be utilised in retail spaces; **Android Advertising Displays** for in store promotion, our **Touch Screen** ranges for customer engagement and purchases and **High Brightness Monitors** for outward facing windows displays.



Food and Drink

This sector is the fastest growing area for Digital Signage. Large fast food chains are already exploiting the tremendous benefits of Digital Signage and it's no surprise as it creates a 31.8% upswing in overall sales volume¹. We have various ranges that are ideal for menu board applications such as our **Android Advertising Displays**, which have an easily wipeable tempered glass front, and our **Network Digital Menu Boards**, which are designed to be a complete cost effective package solution.



Corporate

The integration of technology into the office space is nothing new however the range applications for Digital Signage in corporate environments continues to grow. The most obvious use for Digital Signage in corporate locations is in the boardroom, **using LCD and LED Video Walls** and **4K Slim Bezel Interactive Touch Displa**ys as presentation tools. Another developing area in this environment is the use of Digital Signage for internal communication as it improves employee engagement, increasing productivity by 20%-25%1.



Healthcare

Digital Signage is transforming the way that hospitals and healthcare facilities communicate with staff and patients. Whether used for wayfinding, or displaying healthcare information, Digital Signage offers a chance for hospitals to engage and interact with their patients and improve the level of care. **PCAP Touch Screens** are ideal for hospitals as they feature an easy to clean edge-to-edge glass front. 10% of all Digital Signage displays purchased every year are for the healthcare sector².



Hospitality

Hospitality settings such as hotels, resorts, nightclubs and catering venues have a captive audience looking for information so they are a natural home for Digital Signage. Beautiful displays, such as our elegant **Android Freestanding Digital Posters** and wall mounted **Android Advertising Displays**, can really make a big difference in the overall aesthetic of a hospitality venue and if used correctly can boost customer satisfaction by 46%¹.



Transportation

Transport hubs such as airports, train and bus stations and even bus stops have become the most common places to encounter Digital Signage; they have been utilising its advantages for a number of years. In fact, 90% of train station passengers can be targeted by Digital Signage³. Our **Professional Monitors** are ideal for flight and bus information display systems to show arrivals and departures while our **Android Advertising Displays** and **LCD Video Walls** can be used in duty free areas of airports for advertising.

Education

Educational establishments are ideal environments to really get the most out of Digital Signage The most common solution for schools, colleges, universities and other training facilities are **4K Slim Bezel Interactive Touch Displa**ys used as interactive whiteboards; 75% of teachers agreed that using interactive whiteboards increases students' interest in class⁴. **Android Advertising Displays** can also be used as digital notice boards to communicate up to date information to students, staff and visitors.



Entertainment

Locations such as casinos, theatres, cinemas, zoos, concert halls and theme parks are ideal settings for Digital Signage. In these types of environments Digital Signage can be used as an effective advertising and promotional tool as it has been proven to increase the average purchase amount by 29.5%¹. Our beautiful and eye-catching **Android Freestanding Digital Posters** can be utilised to display upcoming events or special offers on food and drink. For a big impact **LCD Video Walls** command attention in any setting.












Integrated Digital Signage

Typical Digital Signage projects require at least three elements; a commercial display, a media player and a content management system, which would usually come from three separate sources. This approach has many downsides; both when it comes to sourcing compatible components as well as support and maintenance. The installation process, especially for large networks, can be a real challenge when mounting and cabling multiple screens and separate media players. Another problem is supporting a solution that has been packaged together from separate manufactures and software developers; if any issues arise the first step is to diagnose which component is a fault. Obtaining technical support from manufactures and Digital Signage software companies can be very time consuming and can often have large costs involved.

With these challenges in mind we provide all-in-one Digital Signage solutions. This means that we manufacture commercial 24/7 displays with a built-in media player whilst also developing software to be used in conjunction with our hardware. All-in-one solutions are not only easier to sell, install, support and maintain but are also much more cost effective when compared with "packaged" solutions from separate suppliers. We also make our software more streamlined and user-friendly, as we are not competing with traditional Digital Signage software companies who add an abundance of generally redundant features. Using over a decade of industry experience, research and development we have developed a range of plug and play and network all-in-one Digital Signage solutions.



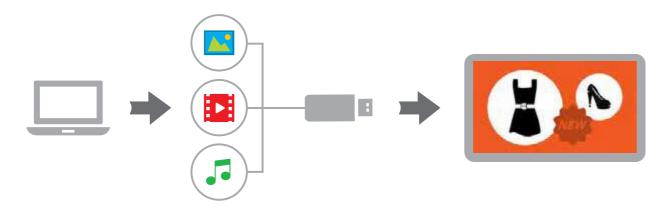

Simple Plug and Play Solution

All of our Android based non-interactive displays can be updated in the simplest way imaginable. Simply load images and videos onto a USB stick, insert this into the display, wait for your content to copy over and then remove. Your images and videos will then play in a continuous loop. This simple update method is designed so that anybody, regardless of IT knowledge or technical resources, can update their screens. This has opened up Digital Signage solutions to more potential end users; now anyone can enjoy the benefits of this dynamic and cutting-edge form of display.

These displays also come with free easy to use scheduling software, for more advanced requirements, that allows you to display different content at various times of the day. The standalone plug and play models can also be upgraded to network versions, without the need for any additional hardware such as a separate network media player.

Android Advertising Displays	_{pg} 07	Android Freestanding Digital Posters	pg 11	High Vibrance Advertising Displays	_{pg} 19	Professional Monitors	Pg 23
4K Large Format Commercial Displays	pg 27	High Brightness Monitors	Pg 35	Ultra High Brightness Monitors	_{pg} 39	Digital Rod Displays	_{pg} 43
Hanging Double-Sided Window Displays	_{pg} 47	Outdoor Digital Advertising Displays	Pg 51	Outdoor Freestanding Digital Posters	pg 55	Outdoor Digital Android Battery A-Boards	_{pg} 59
Digital Android Battery A-Boards	pg 63	POS Android Advertising Displays	pg 83	Ultra-Wide Stretched Displays	pg 87	LCD Shelf Edge Displays	_{pg} 91
Standalone Android Media Players	Jog 107						



All-in-One Network Solution

Our award winning all-in-one network screens provide you with a fully integrated, hassle-free, networked Digital Signage solution. Minimal hardware setup is required; these displays truly deliver an out-of-the-box experience. Once your screen is plugged into the mains all that is left to do is connect it to the internet, via Wi-Fi, Ethernet cable or even 4G if required. You can then login to our user-friendly online portal and update your displays from anywhere in the world. Upload your media to the cloud then use it to create multi-zone layouts that incorporate images, videos, scrolling and static text, RSS feeds, time, date, local weather and even live webpages. Our network solution also allows for more complex scheduling requirements so you can display what you like when you like. For all the available features, go to page 115. Our cloud-based CMS portal can also be used to create and manage content on our touch screen ranges. Anyone can now create interactive playlists in a matter of minutes, without any coding knowledge. For more information go to page 119.

Android Advertising Displays	_{pg} 07	Android Freestanding Digital Posters	pg 11	Network Digital Menu Boards	Pg 15	High Vibrance Advertising Displays pg 19
4K Large Format Commercial Displays	pg 27	High Brightness Monitors	PE 35	Ultra High Brightness Monitors	pg 39	Digital Rod Displays pg 43
Hanging Double-Sided Window Displays	_{pg} 47	Outdoor Digital Advertising Displays	Pg 51	Outdoor Freestanding Digital Posters	pg 55	Outdoor Digital Android Battery A-Boards pg 59
Indoor Digital Android Battery A-Boards	pg 63	PCAP Touch Screen with Dual OS	_{pg} 67	PCAP Touch Screen Kiosk with Dual OS	pg 71	Infrared Freestanding Touch Screen with Dual OS pg 75
POS Android Advertising Displays	pg 83	Ultra-Wide Stretched Displays	_{pg} 87	LCD Shelf Edge Display	s _{pg} 91	Cloud Network Media Players pg 111



Menu Board

If you're looking for a digital menu board solution the first thing that must be considered is the most important factor; budget or style and convenience. The most elegant and striking solution would be our Android Advertising Displays, which also feature a glass front which can be easily cleaned. If budget is the most important consideration then the next matter to address is the update method; are the screens going to be updated over USB or through our online portal? For a cost-effective plug and play solution our Professional Monitor range is ideal. For more features and flexibility our Network Digital Menu Boards can be used.

Network Digita 07 Profession Monitors Menu Boards



. 15

Budget Friendly Displays

For any Digital Signage project where budget is the key consideration then there is only really one question to ask - how are the screens going to be updated? For a simple, user-friendly, USB plug and play update method the **Professional Monitors** are the top choice. If you want to update your screens over the internet and take advantage of the range of features our cloud-based content management system can offer (see page 115) then our Network Digital Menu Boards are the right solution for you. Both of these ranges use fully commercial grade 24/7 LG IPS panels that have a brightness of 450cd/m².





Touch Screens

If your project requires an element of interactivity we are certain to have a solution to meet your needs. We offer a range of PCAP Touch Screens for sleek tablet-style look with edge-to-edge glass; these come in wall mounted, mirror and kiosk versions. For point of sale or meeting room booking systems we also manufacture a small 10" model. If budget is an important factor then you should consider our Infrared Freestanding Multi Touch Screen Posters. All of our commercial touch screen ranges, excluding the 10" model, come with Windows and Android built in and can be updated using our cloud-based CMS (see page 119). For an interactive whiteboard solution our 4K Slim Bezel Interactive Touch Displays are ideal.





Window Displays

For outward facing window displays we have two ranges to choose from depending on budget and location of the window. The more budget friendly version are our High Brightness Monitors which have a brightness of 1,500cd/m²; more than 5 times brighter than a standard domestic TV. For applications where there is a lot of direct sunlight our Ultra High Brightness Monitors are ideal. As well as being even brighter (2,500cd/m²) they are ultra resistant to LCD blackening defect up to a surface temperature of 110°C. Both of these ranges can be updated by either using the simple USB plug and play method or can be upgraded to use our network CMS.



Video Walls

When it comes to video wall projects the bezel size is key. A cost effective solution would be to use our Professional Monitors which have a screen-to-screen bezel size of around 23-30mm. Our LCD Video Wall Displays feature a bezel size of 3.5mm screen-to-screen. The most premium option, for which we also have outdoor models, are our LED Video Wall Solutions which are modular and do not feature any visible bezel at all.




Outdoor

We manufacture both wall mounted and freestanding versions of IP65 rated outdoor displays. The wall mounted Outdoor Digital Advertising Displays and Outdoor Freestanding Digital Posters are designed to look like giant tablets and can be upgraded to PCAP touch screens. We also have an Outdoor Digital Android Battery **A-Board** for outdoor applications where power is not available, opening up a whole new world of possibilities. All of our outdoor screens can be updated by either using the simple USB plug and play method or can be upgraded to use our network CMS.

Outdoor Digital Advertising Displays

Digital Posters

Outdoor Digital Android Battery A-Boards .,55




















Android Advertising Displays

19" | 22" | 32" | 43" | 50" | 55"

Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



450cd/m² IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature when used in either landscape or portrait.



Free Scheduling Software

These displays come with free scheduling software for displaying different content at different times of the day. If you prefer to keep it simple you can update the screen directly without using the software.




24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.



Key Features

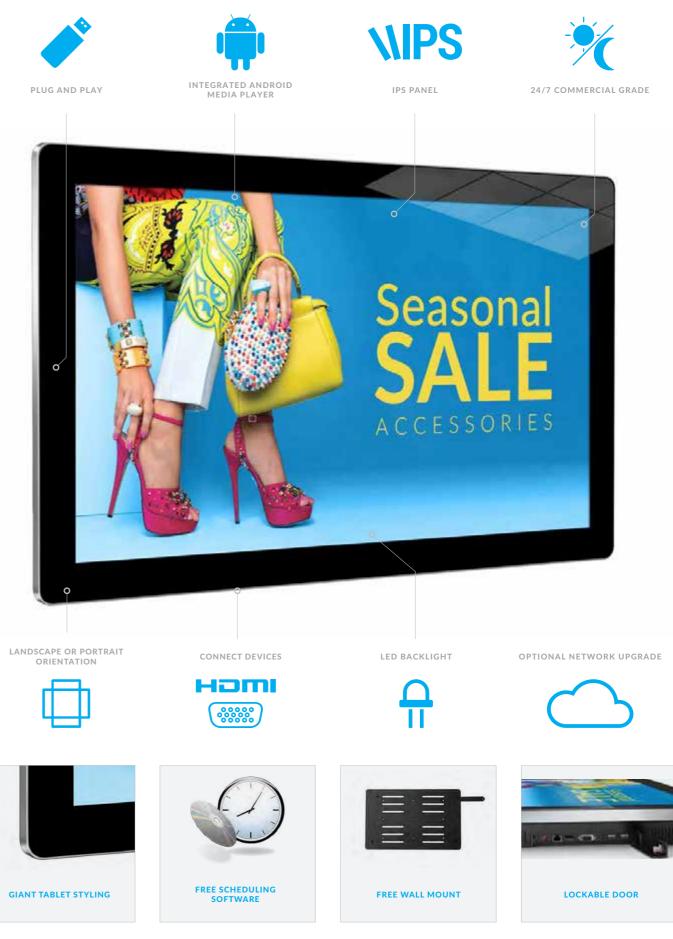















Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.




Multiple Inputs

Should you need to use the screen as a monitor you can connect it to an external source, like a PC or media player, using the HDMI input or the VGA and 3.5mm audio jack inputs.



Low Power Consumption

The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 70,000 hours and the power consumption is reduced by around 30%.



Scrolling Text

You can display a "ticker tape" style scrolling text message along the bottom of the screen, to help you get your message across or help highlight any specific promotions or offers.



- 30% OFF ALL FOOTWEAR - ENDS TONIGHT - SALE NOW O

Giant Tablet Styling

Their tempered glass face, rounded corners, super slim profile and aluminium surround all add to the captivating tablet-like aesthetics as well as protecting the internal components from potential damage.



Free Wall Mount

A super slim wall mount is included at no extra cost, allowing you to mount your screen in either landscape or portrait orientation; ensuring that you have a complete turnkey solution.



Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in both landscape and portrait.



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet. For more information please go to page 115.



		19 Inch	22 Inch	32 Inch	43 Inch	50 Inch	55 Inch		
	Resolution			1920	x1080				
	Display Area (mm)	408.6x229.6	478x269	699x394	942x525	1075.6x605.4	1211x682		
	Aspect Ratio			10	5:9				
Panel	Brightness (cd/m ²)			4	50				
	Colour		16.7M						
	Viewing Angle			17	78°				
	Contrast Ratio			500	00:1				
Audio	Speaker Type			5W, 8	βΩ (x2)				
	Video			HDM	I, VGA				
AV Inputs	Audio			Audio Socl	ket (3.5mm)				
2	Power Consumption (W)	16	22	52	65	75	85		
Power	Input Voltage			AC110~240V	(50Hz~60Hz)				
	Unit Size (WxHxD mm)	501x322x38	590x383x41	814x504x63	1045x638x63	1199x736x44	1366x837x50.1		
	Package Size (WxHxD mm)	578x418x118	660x478x135	956x615x164	1175x775x215	1357x867x176	1525x1016x21		
Mechanical	VESA Holes (mm)	100x100/150x100	100×100	400x200		400x400			
	Net Weight (kg)	6.3	8.3	13.1	22.8	28.05	39.7		
	Gross Weight (kg)	7.35	8.85	16.9	30.2	37	49.7		
	Operating Temperature		0 °C to 50 °C						
	Storage Temperature		-30°C to 60°C						
Environmental	Operating Humidity		10% to 80%						
	Storage Humidity			5% te	o 95%				
	Media Formats	Vide	o (MPG, AVI, MP4,	, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)					
	Media Resolution		1920x1080/1080x1920						
	Internal Memory			60	GB				
	CPU			Quad-Core Corte	ex-A17@1.61GHz				
	GPU			Mali-T760 M	P4 @600MHz				
Carrier	RAM			2GB	DDR3				
Computer	ROM			8GB I	NAND				
	USB			USB2.0 H	HOST (x2)				
	LAN		1	.0/100M Ethernet (N	Network Version Onl	y)			
	Wi-Fi			802.11b/g/n/ac (Ne	etwork Version Only)				
	OS			Andro	id 5.1.1				
	Graphic Engine		OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1						
	Included		Special Wall Mou	nt, Scheduling Softw	are, Remote Control	, Key, User Manual			
Accessories	Optional	Network U	Ipgrade, Touch Scre	en Version, Wall Mo	unt, Floor Stand/Trol	ley, Ceiling Mount, 1	able Stand		
14/	Warranty Period			3 Year V	Varranty				
Warranty	Technical Support			Life	time				



Android Freestanding Digital Posters 50" | 55"

Key Features







PLUG AND PLAY



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



450cd/m² IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature in portrait orientation.



Free Scheduling Software

These displays come with free scheduling software for displaying different content at different times of the day. If you prefer to keep it simple you can update the screen directly without using the software.



24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.



INTEGRATED SPEAKERS

CONNECT DEVICES









FREE SCHEDULING SOFTWARE





IPS PANEL

24/7 COMMERCIAL GRADE



LED BACKLIGHT





OPTIONAL NETWORK UPGRADE





Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.



Internal Locker

Should you need to connect the screen to an external source, like a PC or media player, you can use the HDMI input or the VGA and 3.5mm audio jack inputs and hide the player inside the internal locker.

1 LAN 2 HDMI 3 VGA 4 Audio in 5 2 x USB

Giant Tablet Styling

Their tempered glass face, rounded corners, super slim profile and aluminium surround all add to the captivating tablet-like aesthetics as well as protecting the internal components from potential damage.



White Version Available

A stylish white version of the Android Freestanding Digital Poster is available in both 50" and 55.



Free Integrated Castors

These freestanding displays are a fully potable solution as they feature integrated castors as well as retractable feet for more permanent installations.



Scrolling Text

You can display a "ticker tape" style scrolling text message along the bottom of the screen, to help you get your message across or help highlight any specific promotions or offers.



Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in portrait orientation.



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet. For more information please go to page 115.



		50 Inch	55 Inch	
	Resolution	1920x	1080	
	Display Area (mm)	618.4x1097.8	682.4x1211.6	
	Aspect Ratio	16	:9	
Panel	Brightness (cd/m ²)	45	0	
	Colour	16.7	7M	
	Viewing Angle	17	8°	
	Contrast Ratio	400	0:1	
Audio	Speaker Type	6W, 89	Ω (x2)	
	Video	HDMI	, VGA	
AV Inputs	Audio	Audio Socket (3.5mm)		
Power	Power Consumption (W)	100	120	
Power	Input Voltage	AC110~240V	(50Hz~60Hz)	
	Unit Size (WxHxD mm)	747x1862x50	813x1965x50	
	Package Size (WxHxD mm)	835x2010x535	940x2110x535	
Mechanical	Footprint (WxH mm)	747x400	813x400	
	Net Weight (kg)	82	87	
	Gross Weight (kg)	90	95	
	Operating Temperature	0 °C to	50 °C	
Environmental	Storage Temperature	-30°C t	o 60°C	
Environmental	Operating Humidity	10% to 80%		
	Storage Humidity	5% to	95%	
	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audi	o (MP3, WMA), Image (JPG, GIF, BMP, PNG)	
	Media Resolution	1920x1080/	1080x1920	
	Internal Memory	6G	iΒ	
	CPU	Quad-Core Corte	x-A17@1.61GHz	
	GPU	Mali-T760 MF	24 @600MHz	
Commuter	RAM	2GB [DDR3	
Computer	ROM	8GB N	IAND	
	USB	USB2.0 H	OST (x2)	
	LAN	10/100M Ethernet (N	etwork Version Only)	
	Wi-Fi	802.11b/g/n/ac (Net	twork Version Only)	
	OS	Android	5.1.1	
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1		
A	Included	Scheduling Software, Remote	e Control, Key, User Manual	
Accessories	Optional	Network Upgrade, To	ouch Screen Version	
14/	Warranty Period	3 Year W	/arranty	
Warranty	Technical Support	Lifet	ime	



Network Digital Menu Boards

32" | 43" | 50" | 55"

Key Features



Complete Package Solution

We have combined a 24/7 commercial display, a network Android media player, one year free CMS software and a library of predesigned templates for the ultimate package solution.



24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.



1st Year Free Software Subscription

The first year of using our cloud based CMS is absolutely free. You can also purchase 3 additional year's access at the point of purchase or make a one off payment to have access for life.




Exclusive Template Library

As well as being able to create your own layouts you can choose from our exclusive library of pre-design editable templates. Choose an existing layout, add your own images and information then publish it to your screen.







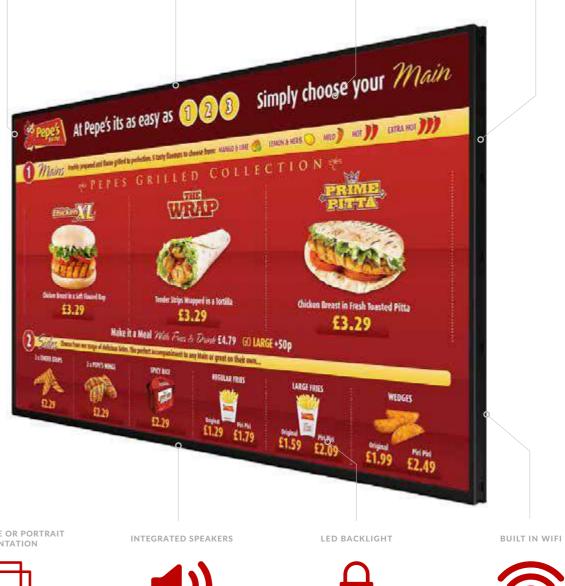

LANDSCAPE OR PORTRAIT ORIENTATION













IPS PANEL

24/7 COMMERCIAL GRADE



450cd/m² IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature when used in either landscape or portrait.



Multi Screen Synchronisation

Create stunning content across multiple displays or just have your menus change at the same time.




Update Instantly and From Anwhere

No special software installation or dedicated PC is required, simply login to our online your portal and update your screens from anywhere in the world with an internet connection.



Narrow Bezel

The slim border on the Digital Menu Boards allows your menu to take centre stage especially when multiple displays are placed side by side.



Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in both landscape and portrait.



Plug and Play Backup

If you lose your internet connection you can still update the screen using a USB stick to keep things simple.



		32 Inch	43 Inch	50 Inch	55 Inch		
	Resolution		1920>	(1080			
	Display Area (mm)	703.4x397.9	941.2x529.42	1073x604	1209.6x680.4		
	Bezel Size (mm)	Top/Left/Right: 9.3 Bottom: 14.8	Top/Left/Right: 11.4 Bottom: 18.18	Top/Left/Right: 11.5 Bottom: 16.5	Top/Left/Right: 11. Bottom: 17		
Panel	Aspect Ratio		16	:9			
	Brightness (cd/m²)		450				
	Colour		16.	7M			
	Viewing Angle		17	8°			
	Contrast Ratio		400	00:1			
Audio	Speaker Type		5W, 8	Ω (x2)			
	Video		HDM	, VGA			
AV Inputs	Audio		Audio Sock	et (3.5mm)			
D	Power Consumption (W)	38	45	55	65		
Power	Input Voltage		AC110~240V (50Hz~60Hz)				
	Unit Size (WxHxD mm)	722x422x65	964x559x60	1096x632x60	1232x708.9x59.3		
	Package Size (WxHxD mm)	862x555x215	1105x698x210	1238x760x195	1385x845x190		
Mechanical	VESA Holes (mm)	400x200/500x200	400x200	400x400/400	x300/400x200		
	Net Weight (kg)	9.15	15.85	23	28		
	Gross Weight (kg)	12.25	19.75	28.9	34.4		
	Operating Temperature		0 °C to 50 °C				
F	Storage Temperature		-30°C to 60°C				
Environmental	Operating Humidity		10% t	o 80%			
	Storage Humidity		5% to	95%			
	Media Formats	Video (MPG,	AVI, MP4, RM, RMVB, TS), Aud	io (MP3, WMA), Image (JPG, 0	GIF, BMP, PNG)		
	Media Resolution		1920x1080/	/1080x1920			
	Internal Memory		60	GB			
	CPU		Quad-Core Cortex-A17@1.61GHz				
	GPU		Mali-T760 MP4 @600MHz				
C	RAM		2GB DDR3				
Computer	ROM		8GB 1	NAND			
	USB		USB2.0 H	IOST (x2)			
	LAN		10/100M	Ethernet			
	Wi-Fi		802.11b	/g/n/ac			
	OS	Android 5.1.1					
	Graphic Engine	Оре	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1				
A	Included		Scheduling Software, Remote Control, User Manual				
Accessories	Optional		Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand				
14/	Warranty Period		3 Year V	Varranty			
Warranty	Technical Support		Life	time			




Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.



Low Power Consumption

The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 70,000 hours and the power consumption is reduced by around 30%.



High Vibrance Android Advertising Display 43" | 55"

Key Features



700cd/m² Brightness

Designed for brightly lit spaces such as retail stores and shopping centres. More than twice the brightness level of a standard domestic screen or monitor to make your content really stand out from the crowd.





Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos on a USB stick, insert in the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.




Narrow Bezel

These displays feature a slim border for applications where this is important, such as placing multiple screens side-by-side.



IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature when used in either landscape or portrait.



LANDSCAPE OR PORTRAIT ORIENTATION

CONNECT DEVICES

C WITH



HOMI 00000







24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.




Free Scheduling Software

These displays come with free optional scheduling software for displaying different content at different times of the day. You can also display a "ticker tape" style scrolling text message along the bottom of the screen.



Low Power Consumption

The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 70,000 hours and the power consumption is reduced by around 30%.



Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in both landscape and portrait.




Slim and Lightweight Design

Using open cell panel manufacturing processes ensure the enclosure of these displays is super slim and lightweight. Making installation a breeze and improving space efficiency.



Multiple Inputs

Should you need to use the screen as a monitor you can connect it to an external source, like a PC or media player, using the HDMI input or the VGA and 3.5mm audio jack inputs.



Scrolling Text

You can display a "ticker tape" style scrolling text message along the bottom of the screen, to help you get your message across or help highlight any specific promotions or offers.



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet. For more information please go to page 115.




		43 Inch	55 Inch		
	Resolution	1920x108	30		
	Display Area (mm)	941.2x529.42	1209.6x680.4		
	Bezel Size (mm)	Top/Left/Right: 11.4 Bottom: 18.18	Top/Left/Right: 11.5 Bottom: 17		
	Aspect Ratio	16:9			
Panel	Brightness (cd/m²)	700			
	Colour	16.7M			
	Viewing Angle	178°			
	Contrast Ratio	4000:1			
Audio	Speaker Type	5W, 8Ω (x	2)		
	Video	HDMI, VG	5A		
AV Inputs	Audio	Audio Socket (3.5mm)		
Dowor	Power Consumption (W)	45	65		
Power	Input Voltage	AC110~240V (50	Hz~60Hz)		
	Unit Size (WxHxD mm)	963.6x558x45	1232x708.9x49.9		
	Package Size (WxHxD mm)	1067x660x163	1385x845x190		
Mechanical	VESA Holes (mm)	400x200)		
	Net Weight (kg)	11.7	18.9		
	Gross Weight (kg)	15.4	25.15		
	Operating Temperature	0 °C to 50	°C		
Environmental	Storage Temperature	-30°C to 60)°C		
Environmental	Operating Humidity	10% to 80	10% to 80%		
	Storage Humidity	5% to 95	%		
	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BI			
	Media Resolution	1920x1080/108	30x1920		
	Internal Memory	6GB			
	CPU	Quad-Core Cortex-A	17@1.61GHz		
	GPU	Mali-T760 MP4 @	9600MHz		
6	RAM	2GB DDR	3		
Computer	ROM	8GB NAN	D		
	USB	USB2.0 HOS	T (x2)		
	LAN	10/100M Eth	ernet		
	Wi-Fi	802.11b/g/r	n/ac		
	OS	Android 5.	1.1		
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1	.1, Renderscript, Direct3D 11.1		
A	Included	Scheduling Software, Remote	Control, User Manual		
Accessories	Optional	Wall Mount, Floor Stand/Trolley, C	Ceiling Mount, Table Stand		
	Warranty Period	3 Year Warr	anty		



Professional Monitors 32" | 43" | 50" | 55"

Key Features

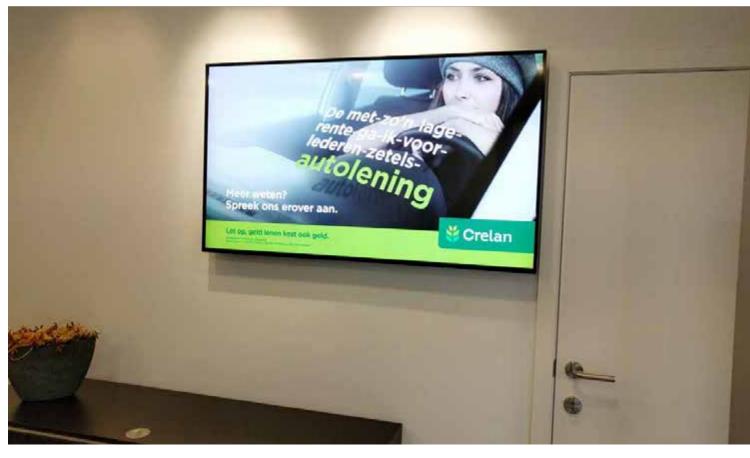

Budget Friendly Professional Displays

These displays are designed to be a cost effective 24/7 commercial display solution. If your application calls for a commercial screen and budget is a major factor these displays are perfect.



24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.



450cd/m² IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature when used in either landscape or portrait.



Narrow Bezel

A slim border helps draw attention to the screens images and not the display for maximum impact messaging. Thanks to the narrow bezel these monitors can also be used as part of a budget friendly video wall.



NIPS PLUG AND PLAY IPS PANEL


NARROW BEZEL

CONNECT DEVICES











LANDSCAPE OR PORTRAIT ORIENTATION






FULL HIGH DEFINITION 1080P





Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick and insert into the display; your images and videos will now play in a continuous loop.




Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.



Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in both landscape and portrait.



BNC Connection

Ideal for CCTV monitor applications our monitors have a BNC input for AV connections. The monitor is able to display video directly from CCTV cameras or from a Digital Video Recorder.




Built-in Video Matrix Processor

Automatically tile an external signal without the need for an expensive matrix box, creating a budget-friendly video wall solution.




Low Power Consumption

The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 70,000 hours and the power consumption is reduced by around 30%.



Connect Devices

Should you need to use the screen as a monitor you can connect it to an external source, like a PC or media player, using the HDMI input or the VGA and 3.5mm audio jack inputs.




RS-232 Control and IR Extension

Remotely control your screens by sending commands over RS-232 or use the free infrared remote control sensor extension for easier kiosk integration.



		32 Inch	43 Inch	50 Inch	55 Inch		
	Resolution		192	Dx1080			
	Display Area (mm)	698.4x392.9	941.2x529.42	1073.78x604	1209.6x680.4		
	Bezel Size	Top/left/right: 12.5, Bottom: 17.5					
	Pixel Pitch	0.369x0.369	0.49x0.49	0.55926x 0.55926	0.6342x0.6342		
Panel	Aspect Ratio		1	.6:9			
	Brightness (cd/m ²)			450			
	Colour		1	5.7M			
	Viewing Angle		1	78°			
	Contrast Ratio	4000:1					
Audio	Speaker Type		5W,	8Ω (x2)			
AV Inputs	Video		HDMI, VGA, Audio Socket (3.5mm), BNC (AV)				
AV Inputs	Control		RS-232				
D	Power Consumption (W)	38	45	55	65		
Power	Input Voltage		AC110~240V (50Hz~60Hz)				
	Unit Size (WxHxD mm)	723.4x422.9x68	963.6x557.9x60.2	1097x633x60	1232x708.9x59.3		
	Package Size (WxHxD mm)	865x560x210	1105x695x210	1235x763x200	1370x842x184		
Mechanical	VESA Holes (mm)	500x200/400x200	400x200	400x400/400;	x300/400x200		
	Net Weight (kg)	9	15.1	23.15	27.95		
	Gross Weight (kg)	11.55	19	29.2	34.3		
	Operating Temperature		0 °C	to 50 °C			
Environmental	Storage Temperature		-30°C	to 60°C			
Environmental	Operating Humidity		10%	to 80%			
	Storage Humidity		5%	to 95%			
Computer	Media Formats		Video (AVI, MP4), Audi	o (MP3), Image (JPG, BMP)			
Computer	Media Resolution		1920x1080/1080x1920				
Accessories	Included		Scheduling Software, Remote Control, User Manual				
Accessories	Optional		Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand				
Warranty	Warranty Period		3 Year	Warranty			
warranty	Technical Support		Lif	etime			

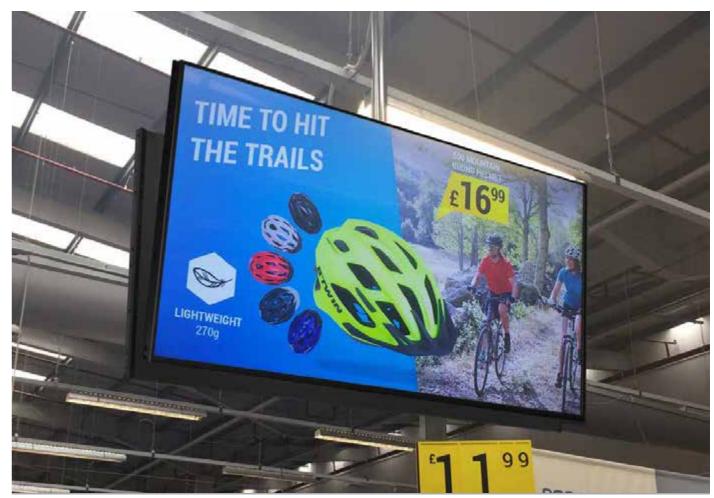


4K Large Format Displays 65" | 70" | 86"

CLICK & COLLECT ORDER ONLINE AT PAPERCHASE, COM & PICK UP INSTORE


Key Features



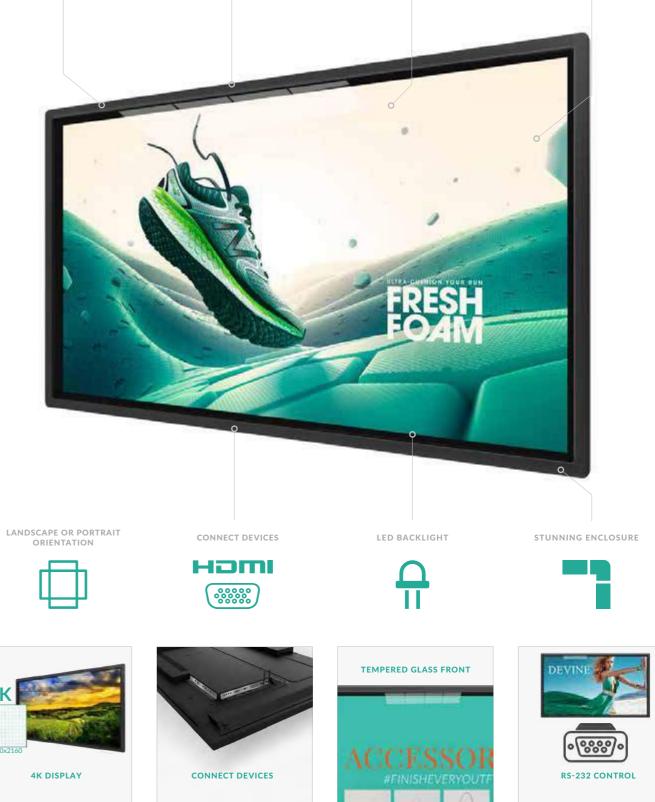

Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



Integrated Android Media Player

There is an integrated Android media player inside the screen allowing you to upgrade to a network version without needing any additional hardware. You can also install third party Android apps if required.




24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.



Remarkable 4K Display

With four times the resolution of Full HD, get amazing picture quality for a truly immersive viewing experience when using HDMI.













4K DISPLAY





24/7 COMMERCIAL GRADE

ECO POWER TIMER


450cd/m² Commercial Panel

A commercial grade panel and components are used to ensure reliable 24/7 use in public spaces. The screen can also be used in landscape or portrait orientation.



Low Power Consumption

The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 70,000 hours and the power consumption is reduced by around 30%.




Temperature Control

A fanless cooling system keeps their panels and other internal components at the optimum working temperature; ensuring a long and reliable life for your screen.



Multiple Inputs

Should you need to use the screen as a monitor you can connect it to an external source, like a PC or media player, using the HDMI input or the VGA and 3.5mm audio jack inputs.



Stunning Enclosure

The precision frame is crafted from black aluminium and assembled in segments so the enclosure can remain sexy and sleek with rounded corners and a tempered glass front for protection. A polymer rear cover keeps the display slim and lightweight.




Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.



RS-232 Control

Remotely control your screens by sending commands over long or short distances using RS-232 protocols, ideal for CCTV



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet. For more information please go to page 115.



		65 Inch	70 Inch	86 Inch			
	Resolution		3840x2160				
	Display Area (mm)	1428.5x803.5	1538.88x865.6	1895x1066			
	Aspect Ratio		16:9				
Panel	Brightness (cd/m²)		450				
	Colour	16.7M					
	Viewing Angle		178°				
	Contrast Ratio		4000:1				
Audio	Speaker Type		5W, 8Ω (x2)				
	Inputs	DisplayPort, HI	DMI x 2, VGA, Audio In, USB 3.0 x 2, AV In	, YPbPr, SD Card			
AV Inputs	Outputs		AV Out, Audio Out, SPDIF				
	Control		RS-232				
2	Power Consumption (W)	280	350	420			
Power	Input Voltage	AC110~240V(50Hz~60Hz)					
	Unit Size (WxHxD mm)	1516.5x892x110.8	1633.1x959.25x112.8	2018.4x1189.5x117.9			
	Package Size (WxHxD mm)	1761x1202x341	1867x1194x340	2330x1710x530			
Mechanical	VESA Holes (mm)	400x40	0/400x600	600x400			
	Net Weight (kg)	44	51.45	81.8			
	Gross Weight (kg)	64.1	71.8	190			
	Operating Temperature		0 °C to 50 °C				
Environmental	Storage Temperature	-30°C to 60°C					
Environmentai	Operating Humidity		10% to 80%				
	Storage Humidity		5% to 95%				
	Media Formats	Video (MPG, AVI, MP4	, RM, RMVB, TS), Audio (MP3, WMA), Ima	ge (JPG, GIF, BMP, PNG)			
	Media Resolution		1920x1080/1080x1920				
	CPU		ARM Quad-core Cortex-A53 1.4GHz				
	RAM		2GB DDR3				
	Architecture		64-bit				
Computer	Graphic Engine		Mali450MP4 (6-core) 450MHz				
	Hard Drive/Internal Memory (eMMC)		16GB				
	USB		USB 3.0 x 2, USB 2.0 x3				
	LAN		10/100 Ethernet				
	Wi-Fi	802.11b/g/n/ac					
	OS	Android 5.0.1					
Accortica	Included	Remote Control, User Manual, Power Lead					
Accessories	Included	Wall Mount, Floor Stand/Trolley					
	Warranty Period		3 Year Warranty				



LCD Video Wall Displays 49" | 55"

Key Features



Super Narrow Bezel (3.5mm)

With a total screen-to-screen bezel size of 3.5mm these displays are ideal as part of a virtually seamless LCD video wall - providing you with an eye catching, and content focused display. Their super narrow bezel allows you to build video walls of any size.




500cd/m² IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature when used in either landscape or portrait.



Daisy Chain Tiling

These displays feature a HDMI in and out so that you can daisy chain video walls of any size without the need for an expensive external matrix controller; providing a hassle free, costeffective solution.



4K Compatible Video Walls

With large video walls content resolution is very important. If you have a 4K source you can achieve stunning Ultra High Definition resolution across your video wall configuration without having to purchase an external matrix controller.







3.5MM SUPER NARROW BEZEL

24/7 COMMERCIAL GRADE



ULTRA RESISTANT TO BLACKENING DEFECT

LED BACKLIGHT







SEAMLESS VIDEO WALLS



DAISY CHAIN TILING

31



TEMPERATURE CONTROL



500 CM/M² IPS COMMERCIAL GRADE

LANDSCAPE OR PORTRAIT ORIENTATION





4K COMPATIBLE




ULTRA RESISTANT TO **BLACKENING DEFECT**



Low Power Consumption

The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 70,000 hours and the power consumption is reduced by around 30%.



Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.




Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in both landscape and portrait.




RS-232 Control

Remotely control your screens by sending commands over long or short distances using RS-232 protocols.



Multiple Inputs

Wide range of video inputs, such as HDMI, VGA, DVI and DisplayPort. These are ideal if the screens are being used individually or being run from an external matrix controller.



1. Audio Out 2. USB (Firmwa 3. RS-232 In 4. RS-232 Out 5. IR Ext 6. VGA 7. DVI 8 Displayport 9. HDMI In 10. HDMI Out

Smart Temperature Control

A fanless cooling system keeps their panels and other internal components at the optimum working temperature; ensuring a long and reliable life for your screen.



24/7 Commercial Grade

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.



Optional External Network Upgrade

Our Cloud Network Media Player can be used allowing you to connect your video wall via Wi-Fi, LAN or 4G, and then remotely update it over the internet. For more information please go to page 115.



		49 Inch	55 Inch	
	Resolution	1920x1080		
	Bezel Size	Bottom/right: 2.34, Top/left: 1.16	Bottom/right: 1.2, Top/left: 2.3	
	Display Area (mm)	1074x604.3	1209.9x680.7	
	Aspect Ratio	16:9		
Panel	Brightness (cd/m ²)	500		
	Colour	16.7M		
	Colour Temperature	10,000K		
	Viewing Angle	178°		
	Contrast Ratio	4000:1		
	Inputs	HDMI In, DVI In, VGA In, RS-232 In, DP In, USB		
AV Inputs/Outputs	Outputs	RS-232 Out x 2, HDMI Out, Audio Out		
	Power Consumption (W)	155	160	
Power	Input Voltage	100V ~ 240V(50/60Hz)		
	Power Management	VESA DPMS		
	Unit Size (WxHxD mm)	1077.5x607.8x113.8	1213.4x684.2x117.9	
	Package Size (WxHxD mm)	1258x858x285	1400x950x280	
Mechanical	VESA Holes (mm)	600x300)	
	Net Weight (kg)	25	31.5	
	Gross Weight (kg)	33.3	40.6	
	Operating Temperature	0 °C to 50	°C	
Environmental	Storage Temperature	-30°C to 60)°C	
	Working Pressure	800-1114 hPa (Altitud	Pa (Altitude:0-2,000m)	
Accessories	Included	1.5m HDMI Cable, LAN Cable and IR Sensor, Remot	te Control, 1.5m Power Cable, User Manua	
ACCESSOFIES	Optional	Network or Standalone Media Player, Touch Screen Frame		
Manage in the	Warranty Period	3 Year Warra	anty	
Warranty	Technical Support	Lifetime	Lifetime	





High Brightness Professional Monitors

32" | 43" | 49" | 55" | 65"




Window Displays (1,500cd/m²)

Brightness is paramount when using outward facing screens, these displays use commercial grade high brightness panels (1,500cd/m²); more than 5 times brighter than a standard home TV to allow easy readability in window displays.




Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



Ultra Resistant Blackening Defect (up to 110°C)

LCD panels exposed to direct sunlight suffer from temporary blackening defect. These displays use a special high brightness panel that can withstand surface temperatures up to 110°C with no blackening defect occurring.



Advanced Temperature Control System

The internal airflow system allows the screen to be in constant use in an outward facing window. The panel and other internal components are kept at the optimum working temperature; ensuring a long and reliable life for your screens.





Key Features





1,500CD/M² SUNLIGHT READABLE



INTEGRATED SPEAKERS







24/7 Commercial Grade

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.



Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.



Landscape or Portrait Orientation

Thanks to their commercial grade panel these displays can be mounted in either landscape or portrait orientation and still retain a 178° viewing angle and remarkable image quality.



Integrated Speakers

The displays feature two integrated slimline speakers for applications that require an audio element.



Android Media Player

There is an integrated Android media player inside the screen allowing you to upgrade to a network version without needing any additional hardware. You can also install third party Android apps if required.




Multiple Inputs

Should you need to use the screen as a monitor you can connect it to an external source, like a PC or media player, using the HDMI input or the VGA and 3.5mm audio jack inputs.



RS-232 Control

Remotely control your screens by sending commands over long or short distances using RS-232 protocols.



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet. For more information please go to page 115.



		32 Inch						
	Resolution			1920x1080				
	Display Area (mm)	698.4x392.85	941.18x529.42	1044x589	1209.6x680.4	1428.5x803.5		
Panel	Aspect Ratio			16:9				
	Brightness (cd/m ²)			1,500				
	Colour		16.7M					
	Viewing Angle			178°				
	Contrast Ratio	4000:1	3000:1		5000:1			
Audio	Speaker Type			2W, 5Ω (x2)				
	Video			HDMI, VGA				
AV Inputs	Audio			Audio Socket (3.5mm)				
2	Power Consumption (W)	180	230	300	340	420		
Power	Input Voltage		A	C110~240V (50Hz~60H	lz)	-		
	Unit Size (WxHxD mm)	748x442.8x69.5	987.2x575.1x57.2	1122x652x58	1273x743x93	1539x908.4x10		
	Package Size (WxHxD mm)	907x600x237	1123x725x215	1275x784x234	1435x895x285	1738x1105x32		
Mechanical	VESA Holes (mm)	400x200	400x200 400x4		400 600x400			
	Net Weight (Kg)	14.6	20.7	23.2	40.15	63.25		
	Gross Weight (Kg)	18.1	24.4	28.8	46.6	74.25		
	Surface Panel Temperature		110°C					
	Operating Temperature		0 °C to 50 °C					
Environmental	Storage Temperature		-30°C to 60°C					
	Operating Humidity		10% to 80%					
	Storage Humidity			5% to 95%				
	Media Formats	Video (MPG, AVI, MP4, RM, RM	VB, TS), Audio (MP3, WI	MA), Image (JPG, GIF, BN	MP, PNG)		
	Media Resolution		1920x1080/1080x1920					
	Internal Memory			6GB				
	CPU		Quad	d-Core Cortex-A17@1.6	1GHz			
	GPU		Ν	/ali-T760 MP4 @600MH	łz			
C	RAM			2GB DDR3				
Computer	ROM			8GB NAND				
	USB			USB2.0 HOST (x2)				
	LAN		10/100M	10/100M Ethernet (Network Version Only)				
	Wi-Fi		802.11	b/g/n/ac (Network Versi	on Only)			
	OS		Android 5.1.1					
	Graphic Engine		OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1					
A	Included		Scheduling So	oftware, Remote Control	, User Manual			
Accessories	Optional	Ne	etwork Upgrade, Wall Mo	ount, Floor Stand/Trolley	, Ceiling Mount, Table St	and		
	Warranty Period			3 Year Warranty				
Warranty	Technical Support			Lifetime				



Ultra High Brightness Professional Monitors

46" | 55" | 65"



Direct Sunlight Readable (2,500cd/m²)

Designed for window displays that face the challenge of direct sunlight. These displays use commercial grade ultra high brightness panels (2,500cd/m²); up to 10 times brighter than a domestic television.



Advanced Temperature Control System

The internal airflow system allows the screen to be in constant use in an outward facing window. The panel and other internal components are kept at the optimum working temperature; ensuring a long and reliable life for your screens.





Ultra Resistant Blackening Defect (up to 110°C)

LCD panels exposed to direct sunlight suffer from temporary blackening defect. These displays use a special ultra-high brightness panel that can withstand surface temperatures up to 110°C with no blackening defect occurring.



IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature when used in either landscape or portrait.





Key Features



2,500CD/M² SUNLIGHT READABLE 24/7 COMMERCIAL GRADE



Richmond Hill, Edgbaston Parkers Estate Agents

5

INTEGRATED SPEAKERS

LED BACKLIGHT



- **f**





ULTRA RESISTANT TO BLACKENING DEFECT



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



Android Media Player

There is an integrated Android media player inside the screen allowing you to upgrade to a network version without needing any additional hardware. You can also install third party Android apps if required.



Integrated Speakers

The displays feature two integrated slimline speakers for applications that require an audio element.



Freestanding White Version Available

A stylish white freestanding version of the Ultra High Brightness Monitor is available in a 46" model.



24/7 Commercial Grade

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.




Multiple Inputs

Should you need to use the screen as a monitor you can connect it to an external source, like a PC or media player, using the HDMI input or the VGA and 3.5mm audio jack inputs.



RS-232 Control

Remotely control your screens by sending commands over long or short distances using RS-232 protocols.



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet. For more information please go to page 115.



		46 Inch	55 Inch	65 Inch			
	Resolution		1920x1080				
	Display Area (mm)	1018.1x572.7	1210x680.8	1429x804			
	Aspect Ratio		16:9				
Panel	Brightness (cd/m²)		2,500				
Panel	Colour	16.7M					
	Viewing Angle		178°				
	Contrast Ratio	50	000:1	4000:1			
	Blackening Defect Free		Up to 110°C (230°F)				
Audio	Speaker Type		2W, 5Ω (x2)				
A) (la a uta	Video		HDMI, VGA				
AV Inputs	Audio		Audio Socket (3.5mm)				
Daviaa	Power Consumption (W)	380	440	490			
Power	Input Voltage		AC110~240V (50Hz~60Hz)				
	Unit Size (WxHxD mm)	1080.5x635.1x132.7	1272.6x743.4x132.8	1491x866x123.5			
Mechanical	Package Size (WxHxD mm)	1220x781x278	1420x891x295	1650x1000x280			
	VESA Holes (mm)		600x400				
	Net Weight (kg)	28.05	36	56.1			
	Gross Weight (kg)	31.6	44.15	67.45			
	Surface Panel Temperature		110°C				
	Operating Temperature	0 °C to 50 °C					
Environmental	Storage Temperature	-30°C to 60°C					
	Operating Humidity		10% to 80%				
	Storage Humidity		5% to 95%				
	Media Formats	Video (MPG, AVI, MP4	, RM, RMVB, TS), Audio (MP3, WMA), Ima	ge (JPG, GIF, BMP, PNG)			
	Media Resolution		1920x1080/1080x1920				
	Internal Memory		6GB				
	CPU		Quad-Core Cortex-A17@1.61GHz				
	GPU		Mali-T760 MP4 @600MHz				
6	RAM		2GB DDR3				
Computer	ROM		8GB NAND				
	USB		USB2.0 HOST (x2)				
	LAN		10/100M Ethernet (Network Version Only	/)			
	Wi-Fi		802.11b/g/n/ac (Network Version Only)				
	OS	Android 5.1.1					
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11					
Accessories	Included	Sch	eduling Software, Remote Control, User M	anual			
ALLESSUITES	Optional	Network Upgrade	e, Wall Mount, Floor Stand/Trolley, Ceiling	Mount, Table Stand			
Warranty	Warranty Period		3 Year Warranty				
warranty	Technical Support		Lifetime				



Digital Rod Displays 15"

Key Features





Sunlight Readable Digital Light Pockets

Seize the benefits of these dynamic LCD digital light pockets. Ideal for combining with static light pockets in window displays to provide eye-catching motion alongside printed signage. Really catch the attention of passers-by and potential customers.



Rear Graphics Pocket

On the rear of the display there is a pocket that a printed graphic can be inserted into to really maximise on the space used. This can be removed if necessary but comes as standard at no extra cost.






Rod Powered Displays

No mains cable is required to provide power as these innovative screens are powered via the rods on which they are mounted. Achieve a clean and seamless installation with no cables whatsoever for a modern and sleek feel.




1,000cd/m² Commercial Panel

Brightness is paramount when using outward facing screens, these displays use commercial grade high brightness panels (1,000cd/m²); almost 4 times brighter than a standard home TV to allow easy readability in window displays.



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick and insert into the display; your images and videos will now play in a continuous loop.



24/7 Usage

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and are designed for commercial use.



Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.



Synchronise Multiple Displays

Synchronise your content across multiple screens in the same window display. You can achieve the effect of one large image or video across multiple screens or have content playing and transitioning in perfect unison.



Free Scheduling Software

These displays come with free scheduling software for displaying different content at different times of the day. If you prefer to keep it simple you can update the screen directly without using the software.



Android Media Player

There is an integrated Android media player inside the screen allowing you to upgrade to a network version without needing any additional hardware. You can also install third party Android apps if required.



LED Frame

These displays have an attractive LED illuminated bevelled edge to compliment traditional static light pockets seamlessly.



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet. For more information please go to page 115.



		15 Inch
	Resolution	1920x1080
	Display Area (mm)	344x193.5
	Aspect Ratio	16:9
Panel	Brightness (cd/m ²)	1000
	Colour	16.7M
	Viewing Angle	178°
	Contrast Ratio	5000:1
Audio	Speaker Type	5W, 8Ω (x2)
	Video	HDMI, VGA
AV Inputs	Audio	Audio Socket (3.5mm)
	Power Consumption (W)	16
Power	Input Voltage	12V (DC)
	Unit Size (WxHxD mm)	430x280x49.2*
4 1 1	Package Size (WxHxD mm)	510x360x185
Mechanical	Net Weight (kg)	3.3
	Gross Weight (kg)	6.1
	Operating Temperature	0 °C to 50 °C
	Storage Temperature	-30°C to 60°C
Environmental	Operating Humidity	10% to 80%
	Storage Humidity	5% to 95%
	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)
	Media Resolution	1920x1080/1080x1920
	Internal Memory	6GB
	CPU	Quad-Core Cortex-A17@1.61GHz
	GPU	Mali-T760 MP4 @600MHz
	RAM	2GB DDR3
Computer	ROM	8GB NAND
	USB	USB2.0 HOST (x2)
	LAN	10/100M Ethernet (Network Version Only)
	Wi-Fi	802.11b/g/n/ac (Network Version Only)
	OS	Android 5.1.1
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1
	Included	Scheduling Software, Remote Control, User Manual
Accessories	Optional	Network Upgrade, Rod Transformer Kit, Rod Fittings Kit
	Warranty Period	3 Year Warranty
Warranty	Technical Support	Lifetime

*Includes Rear Graphics Pocket





Hanging Double-Sided Window Displays

43" | 55"

Key Features



Double Sided Window Display

Grab the attention of onlookers with the outward facing, sunlight readable screen. Once your customers are inside the building you can then use the inward facing display to reinforce your message further.



Ultra Resistant Blackening Defect (up to 110°C)

LCD panels exposed to direct sunlight suffer from temporary blackening defect. These displays use a special high brightness panel that can withstand surface temperatures up to 110°C with no blackening defect occurring.



Window Displays (700cd/m²)

Brightness is paramount when using outward facing screens, these displays use commercial grade high brightness panels (700cd/m²); more than twice the brightness of a standard home TV to allow easy readability in window displays.



Plug and Play

Plug and play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.







DOUBLE SIDED DISPLAY

D DISPLAY

24/7 COMMERCIAL GRADE



IPS PANEL

PLUG AND PLAY









DOUBLE SIDED DISPLAY




24/7 Commercial Grade

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours; a true commercial grade solution.



Super Slim Design

Even though these displays feature two separate screens they have a profile thinner than most single-sided displays. They have a remarkable depth of just 23mm, allowing for stylish and modern window displays.



Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in portrait orientation.



Integrated Ceiling Mount

The screen comes with an integrated wire hanging mounting solution so no additional ceiling mount is required. You can even hide unsightly power and data cables in the cover tubes provided.



Integrated Android Media Player

There is an integrated Android media player inside the screen allowing you to upgrade to a network version without needing any additional hardware. You can also install third party Android apps if required.



700cd/m² & 450cd/m² IPS Panel

The outward facing screen uses a high brightness panel for grabbing the attention of passers-by while the inward facing screen uses a lower brightness panel for easy indoor readability.



Integrated Speakers

The displays feature two integrated slimline speakers for applications that require an audio element.



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet. For more information please go to page 115.




		43 Inch	55 Inch
Panel	Resolution	1920x1080	
	Display Areas (mm)	943x536	1209.6×680.4
	Aspect Ratio	16:9	
	Outward Brightness (cd/m ²)	700	
	Inward Brightness (cd/m ²)	450	
	Colour	16.7M	
	Viewing Angle	178°	
	Contrast Ratio	1200:1	1200:1
Audio	Speaker Type	2W, 8Ω (x2)	
A)/ Inputs	Video	HDMI, VGA	
AV Inputs	Audio	Audio Socket (3.5mm)	
Power	Power Consumption (W)	150	220
	Input Voltage	AC100~230V (50Hz~60Hz)	
	Unit Size (WxHxD mm)	1180x635x23	1573x828x23
Mechanical	Package Size (WxHxD mm)	1300x750x160	1590x930x160
Mechanical	Net Weight (kg)	16.9	26.1
	Gross Weight (kg)	22.5	34.3
	Operating Temperature	0 °C to 40 °C	
Environmental	Storage Temperature	-20°C to 60°C	
Environmental	Operating Humidity	0% to 90%	
	Storage Humidity	0% to 95%	
	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)	
	Media Resolution	1920x1080/1080x1920	
	Internal Memory	6GB	
	CPU	Quad-Core Cortex-A17@1.61GHz	
	GPU	Mali-T760 MP4 @600MHz	
Computer	RAM	2GB DDR3	
Computer	ROM	8GB NAND	
	USB	USB2.0 HOST (x2)	
	LAN	10/100M Ethernet (Network Version Only)	
	Wi-Fi	802.11b/g/n/ac (Network Version Only)	
	OS	Android 5.1.1	
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1	
Accessories	Included	Installation Kit (includes 2 x 2.4m Wire Ropes), Scheduling Software, Remote Control, User Manual	
	Optional	Network Upgrade	
Warranty	Warranty Period	3 Year Warranty	



Outdoor Digital Advertising Displays

22" | 32" | 43" | 49" | 55" | 65"

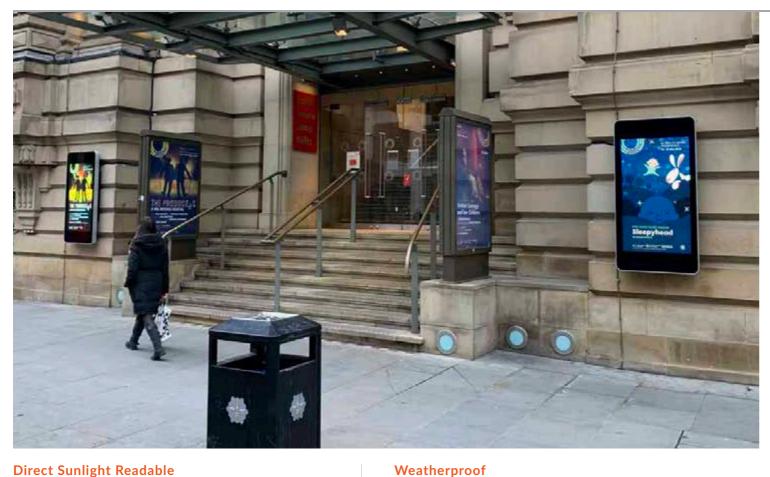

Direct Sunlight Readable

Designed for the challenge of direct sunlight, these displays use commercial grade ultra high brightness panels (2,500cd/m²); up to 10 times brighter than a domestic television*.





Vandalproof

The enclosure is made from mild steel as well as having a thermally toughened glass front. Controls and inputs are also hidden and not accessible to passers-by to avoid tampering.





2,500cd/m

which means it keeps out airborne swarf, dust and other particles as well as being protected from any wet weather conditions.

Designed with a rugged, corrosion protected, outer casing to give

protection from the elements. The outer casing has an IP65 rating






Advanced Temperature Control System

The internal airflow system keeps your screen running at the optimal temperature regardless of the external conditions to maximise the life of your product. Built in air-conditioning can be tailored to allow the display to work in any climate.





Key Features
















IP65 Rated Sturdy Enclosure

An IP65 rating means that display is able to withstand all wet weather conditions and also features waterproof over moulded AV connectors.



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



Ambient Light Sensor

The display has a light sensor that changes the screen's brightness depending on the ambient light ensuring the most suitable brightness at any time of the day.



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet. For more information please go to page 115.



Anti Reflective Glass

The front glass face is specially treated which helps to diffuse direct sunlight making the display easily readable in bright weather conditions.



Lockable Wall Mount

A lockable wall mount is included at no extra cost, allowing you to securely mount your screen in either landscape or portrait orientation; ensuring that you have a complete turnkey solution.



Internal Locker

Should you need connect the screen to an external source, like a PC or media player, you can use the HDMI input or the VGA and 3.5mm audio jack inputs and hide the player inside the internal locker.



Hardware Modifications

These displays can be adapted in a variety of ways including a touch screen upgrade and the integration of a 4G module or camera.



		22 Inch	32 Inch	43 Inch	49 Inch	55 Inch	65 Inch
	Resolution		1920×1080				
Panel	Pixel Pitch	0.2537x 0.2537	0.36375x0.36375	0.1615x0.4845	0.565x0.565	0.21x0.63	0.744x0.744
	Display Area (mm)	270x477	396x702	529x941	603x1073	686x1215	803.5x1428.5
	Aspect Ratio		16:9				
	Brightness (cd/m ²)	2,000	2,000 2,500				
	Colour		16.7M				
	Viewing Angle		178°				
	Contrast Ratio		8000:1				
AV Inputs	Video	HDMI, VGA (Internal)	HDMI, VGA (Internal) HDMI, VGA				
2	Power Consumption (W)	130	190	250	300	430	550
Power	Input Voltage		AC110~240V (50Hz~60Hz)				
	Unit Size (WxHxD mm)	397x736x120	516x1041x130	670x1410x140	746x1500x140	817x1638x140	990x1910x140
	Package Size (WxHxD mm)	845x515x280	1180x640x338	1550x793x302	1632x860x300	1800x1050x310	2030x1100x320
	VESA Holes (mm)	250x250	340x340	400x400/400x800	500x400/500x800	600x400/600x800	800x400/1000x40
Mechanical	Net Weight (kg)	20.05	36.2	58.75	80	85	95
	Gross Weight (kg)	23.5	45	70.15	91	98	120
	IK Rating		ΙΚΟ8				
	Operating Temperature:		-20 °C to 50 °C				
	Operating Humidity:			10%	- 80%		
Environmental	Storage Temperature:		-30°C - 60°C				
	Storage Humidity:		5% - 90%				
	Enclosure Protection		IP65				
	Media Formats	Vid	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)				
	Media Resolution		1920x1080/1080x1920				
	Internal Memory		6GB				
	CPU		Quad-Core Cortex-A17@1.61GHz				
	GPU		Mali-T760 MP4 @600MHz				
	RAM		2GB DDR3				
Computer	ROM		8GB NAND				
	USB		USB2.0 HOST (x2)				
	LAN		10/100M Ethernet (Network Version Only)				
	Wi-Fi		802.11b/g/n/ac (Network Version Only)				
	OS		Android 5.1.1				
	Graphic Engine		OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1				
Accessories	Included		AC Power Cable, Remote Control, Wall Mount				
	Optional		Touch Screen Upgrade, Network Upgrade, Camera				
	Warranty Period		3 Year Warranty				
Warranty	Technical Support		Lifetime				



Outdoor Freestanding Digital Posters

49" | 55"

FILOU

Direct Sunlight Readable

Designed for the challenge of direct sunlight, these displays use commercial grade ultra high brightness panels (2,500 cd/m²); up to 10 times brighter than a domestic television.



Vandalproof

The enclosure is made from mild steel as well as having a thermally toughened glass front. Controls and inputs are also hidden and not accessible to passers-by to avoid tampering.





Weatherproof

Designed with a robust, corrosion protected, outer casing to give protection from the elements. The outer casing has an IP65 rating which means it keeps out airborne swarf, dust and other particles as well as being protected from any wet weather conditions.





Protection from the weather!

Advanced Temperature Control System

The internal airflow system keeps your screen running at the optimal temperature regardless of the external conditions to maximise the life of your product. Built in air-conditioning can be tailored to allow the display to work in any climate.









2,500 CD/M² SUNLIGHT READABLE

Key Features



VANDAL PROOF

DUST TIGHT









55





PLUG AND PLAY









ANTI-REFLECTIVE GLASS

IP65 Rated Sturdy Enclosure

An IP65 rating means that display is able to withstand all wet weather conditions and also keeps out airborne dust.



Anti Reflective Glass

The front glass face is specially treated which helps to diffuse direct sunlight making the display easily readable in bright weather conditions.



Ambient Light Sensor

The display has a light sensor that changes the screen's brightness depending on the ambient light ensuring the most suitable brightness at any time of the day.



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet. For more information please go to page 115.



Easy Maintenance

The screen is designed to allow for easy front access using hydraulic cylinders when maintenance is required.



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



Internal Locker

Should you need connect the screen to an external source, like a PC or media player, you can use the HDMI input or the VGA and 3.5mm audio jack inputs and hide the player inside the internal locker.



Hardware Modifications

These displays can be adapted in a variety of ways including a touch screen upgrade and the integration of a 4G module or camera.



		49 Inch	55 Inch	
	Resolution 1920x1080			
Panel	Pixel Pitch	0.5592 x 0.5592 0.21x0.63		
	Display Area (mm)	610x1079.8	680.2x1209.4	
	Aspect Ratio	16:9		
	Brightness (cd/m ²)	2,500		
	Colour	1.06 B	1.073 G	
	Viewing Angle	178°		
	Contrast Ratio	8000:1		
AV Inputs	Video	HDMI, VGA		
2	Power Consumption (W)	300	430	
Power	Input Voltage	AC110~240V (50)	Hz~60Hz)	
	Unit Size (WxHxD mm)	870x1950x182	960x2032.5x203	
	Package Size (WxHxD mm)	2030x993x368	2100x1040x370	
	Footprint (WxHxD mm)	890x500	990x500	
Mechanical	Net Weight (kg)	120	150	
	Gross Weight (kg)	147	186	
	IK Rating	IK08		
	Operating Temperature:	-20 °C to 50 °C		
	Operating Humidity:	10% - 80%		
Environmental	Storage Temperature:	-30°C - 60°C		
	Storage Humidity:	5% - 90%		
	Enclosure Protection	IP65		
	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)		
	Media Resolution	1920x1080/1080x1920		
	Internal Memory	6GB		
	CPU	Quad-Core Cortex-A17@1.61GHz		
	GPU	Mali-T760 MP4 @600MHz		
Computor	RAM	2GB DDR3		
Computer	ROM	8GB NAND		
	USB	USB2.0 HOST (x2)		
	LAN	10/100M Ethernet (Network Version Only)		
	Wi-Fi	802.11b/g/n/ac (Network Version Only)		
	OS	Android 5.1.1		
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1		
Accessories	Included	AC Power Cable, Remote Control		
	Optional	Touch Screen Upgrade, Network Upgrade, Camera		
Marranty	Warranty Period	3 Year Warranty		
Warranty	Technical Support	Lifetime		





Outdoor Digital Android Battery A-Boards 43"

Key Features



Fully Portable


Thanks to the lightweight enclosure, rugged castors and sturdy non-foldable design this innovative display can be easily moved around by one person.



Secure Locking Bar

Once in position the rugged castors can be locked in place with the built in locking bar. For additional security a padlock can be used to lock this in place.



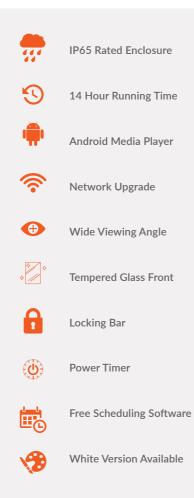





ROBUST ENCLOSURE

AMBIENT LIGHT SENSOR









BATTERY POWERED





INTEGRATED ANDROID MEDIA PLAYER



OPTIONAL NETWORK UPGRADE



PLUG AND PLAY









IP65 Rated Weatherproof Enclosure

The outer casing has an IP65 rating which means it keeps out all airborne swarf, dust and other particles as well as being protected from any wet weather conditions; broadening the range of possible environments.





700cd/m² IPS Panel

The high brightness LCD panel used in this display is up to three times brighter than a domestic TV making it ideal for outdoor spaces.



Stylish Robust Enclosure

These displays feature a tempered glass front for panel protection and a moulded polymer rear for improved portability. The display, support and castors are fixed unlike more traditional A-Boards for supreme durability.



Ambient Light Sensor

The display has a light sensor that changes the screen's brightness depending on the ambient light ensuring the most suitable brightness depending on the environment.



Battery Powered Display

The integrated lithium-polymer battery revolutionises the way you can use digital signage. This commercial grade slimline battery solution gives you over 14 hours running time.



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos on a USB stick, insert in the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



Charge Level Indicator

This handy indication meter tells you exactly how much charge you have left in your battery for ultimate convenience.



White Version Available

As well as the classic piano black model you can also order a modern and stylish white version if required.



		43 Inch	
	Resolution	1920x1080	
Panel	Display Area (mm)	531.4x943.2	
	Aspect Ratio	16:9	
	Brightness (cd/m²)	700	
	Colour	16.7M	
	Viewing Angle	178°	
	Contrast Ratio	5000:1	
Audio	Speaker Type	5W, 8Ω (x2)	
	Battery Technology	Integrated lithium polymer	
	Charging Time	7 hours	
	Battery Life	12 hours	
Battery	Battery Capacity	44000mAh	
	Power Supply	29.4V - 21V	
	Power Consumption	126W	
	Energy	1108.8 Watt-hours	
Mechanical	Unit Size (WxHxD mm)	1232x604.7x478	
	Package Size (WxHxD mm)	1310x745x645	
	Footprint (WxH mm)	604.7x478	
	Net Weight (kg)	37.5	
	Gross Weight (kg)	43	
	Operating Temperature	0 °C to 50 °C	
	Storage Temperature	-30°C to 60°C	
Environmental	Operating Humidity	10% to 80%	
	Storage Humidity	5% to 95%	
	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)	
	Media Resolution	1920x1080/1080x1920	
	Internal Memory	6GB	
	CPU	Quad-Core Cortex-A17@1.61GHz	
	GPU	Mali-T760 MP4 @600MHz	
	RAM	2GB DDR3	
Computer	ROM	8GB NAND	
	USB	USB2.0 HOST (x2)	
	LAN	10/100M Ethernet (Network Version Only)	
	Wi-Fi	802.11b/g/n/ac (Network Version Only)	
	OS	Android 5.1.1	
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1	
Accessories	Included	Scheduling Software, Remote Control, User Manual, Charger, Mains Power Cable	
	Optional	Network Upgrade, Security Chain	
Warranty	Warranty Period	3 Year Warranty	
	Warranty Period (Battery)	3 Year Warranty*	
*	Technical Support	Lifetime	



*Excludes degradation and user damaged caused by sulphation, deep cycling and o

Indoor Digital Android Battery A-Boards 49"

Key Features



Digital A-Board

Stand out from the crowd with this innovative portable digital signage solution. A mains plug is no longer needed for you to deliver your digital messaging, opening up a whole world of new possibilities.



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



Battery Powered Display

The integrated lithium-polymer battery revolutionises the way you can use digital signage. This commercial grade slimline battery solution gives you over 12 hours running time.



700cd/m² IPS Panel

The high brightness LCD panel used in this display is up to three times brighter than a domestic TV making it ideal for brightly lit public spaces.















63





700CD/M² IPS PANEL

OPTIONAL NETWORK UPGRADE



Ambient Light Sensor

The display has a light sensor that changes the screen's brightness depending on the ambient light ensuring the most suitable brightness depending on the environment.



Power Via Mains Plug

The Digital Android Battery A-Board can be powered via mains electricity supply by connecting the charging cable to a wall socket.



Free Scheduling Software

These displays come with free optional scheduling software for displaying different content at different times of the day. You can also display a "ticker tape" style scrolling text message along the bottom of the screen.



Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in portrait orientation.



Charge Level Indicator

This handy indication meter tells you exactly how much charge you have left in your battery for ultimate convenience.



Integrated Castors

These freestanding displays are a fully portable solution and can be easily moved by one person as they feature fixed castors. These wheels can be locked to prevent the screen from moving once in place.



Safety Hinges

The Digital Android Battery A-Board hinges guarantee the safety of the operator as they let the operator dictate the speed of the movement when closing or opening up the legs of the A-Board.



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet. For more information please go to page 115.



		49 Inch	
	Resolution	1920x1080	
Panel	Display Area (mm)	606x1076	
	Aspect Ratio	16:9	
	Brightness (cd/m²)	700	
	Colour	16.7M	
	Viewing Angle	178°	
	Contrast Ratio	5000:1	
Audio	Speaker Type	5W, 8Ω (x2)	
	Battery Technology	Integrated lithium polymer	
	Charging Time	7 hours	
	Battery Life	12 hours	
Battery	Battery Capacity	44000mAh	
	Power Supply	29.4V - 21V	
	Power Consumption	126W	
	Energy	1108.8 Watt-hours	
	Unit Size (WxHxD mm)	682.4x1597.3x76.5	
Mechanical	Package Size (WxHxD mm)	815x1780x375	
	Footprint (WxH mm)	682.4x718.6	
	Net Weight (kg)	47.2	
	Gross Weight (kg)	58.2	
	Operating Temperature	0 °C to 50 °C	
	Storage Temperature	-30°C to 60°C	
Environmental	Operating Humidity	10% to 80%	
	Storage Humidity	5% to 95%	
	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)	
	Media Resolution	1920x1080/1080x1920	
	Internal Memory	6GB	
	CPU	Quad-Core Cortex-A17@1.61GHz	
	GPU	Mali-T760 MP4 @600MHz	
	RAM	2GB DDR3	
Computer	ROM	8GB NAND	
	USB	USB2.0 HOST (x2)	
	LAN	10/100M Ethernet (Network Version Only)	
	Wi-Fi	802.11b/g/n/ac (Network Version Only)	
	OS	Android 5.1.1	
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1	
Accessories	Included	Scheduling Software, Remote Control, User Manual, Charger, Mains Power Cable	
	Optional	Network Upgrade, Security Chain	
	Warranty Period	3 Year Warranty	
Warranty	Warranty Period (Battery)	3 Year Warranty*	
**allality	Technical Support	Lifetime	



*Excludes degradation and user damaged caused by sulphation, deep cycling and overcharging.

PCAP Touch Screens with Dual OS

22" | 32" | 43" | 50" | 55"



Dual OS - Windows & Android

Both Android and Windows operating systems are installed on the integrated PC for ultimate flexibility. These displays provide a fully integrated solution - whether your application calls for Android or Windows.



Surface Plasma Treatment

The oleophobic coating makes the glass front more resistance to oil and water residue left by fingerprint marks and makes touch gestures smoother. Unlike other touch screens the glass is not etched, vastly improving the optical clarity.



None Treated Touch Screen

PCAP Surface Plasma Treated Touch Screen

10 Point PCAP Touch

Having up to 10 touch points allows you to manipulate images, zoom in an out as well as perform many other touch gestures; much like you would with a domestic tablet. It also allows for multiple users interacting with the screen at one time.



450cd/m² IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature when used in either landscape or portrait.



Key Features








24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.



Attach External Devices

If the internal PC is not powerful enough for your application you can connect it to an external source, like a more powerful PC or media player, using HDMI or VGA/3.5mm audio and USB to use the display as a touch screen monitor.



Built In Wi-Fi

As well as having an Ethernet port you can wirelessly connect to the internet thanks to the built in Wi-Fi.




Mirror Version

A special version of the PCAP Touch Screen with a mirror finish is available in a 50" model.




Low Power Consumption

The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 70,000 hours and the power consumption is reduced by around 30%.



Giant Tablet Styling

Their tempered edge-to-edge glass face, rounded corners, super slim profile and aluminium surround all add to the captivating tablet-like aesthetics as well as protecting the internal components from potential damage.



Integrated Speakers

The displays feature two integrated slimline speakers for applications that require an audio element.



Touch CMS

For a small charge you can take advantage of our user-friendly CMS, allowing you to conveniently create your own interactive content. For more information please go to page 119.



		22 Inch	32 Inch	43 Inch	50 Inch	55 Inch	
	Resolution			1920x1080			
	Display Area (mm)	478x269	701.4x395.8	942.5x530.5	1076x606	1211x682	
	Aspect Ratio	16:9					
Panel	Brightness (cd/m²)	450					
	Colour	16.7M					
	Viewing Angle	178°					
	Contrast Ratio			5000:1			
	Touch Technology			Projected Capacitive			
Touch	Touch Points			10			
	Glass Hardness			7H minimum			
Audio	Speaker Type			2W, 5Ω (x2)			
	Inputs (when used as monitor)			HDMI, VGA, RS-232			
AV Inputs/Outputs	Audio Input (when used as monitor)			Audio Socket (3.5mm)			
	Audio Output (Internal PC)			Audio Socket (3.5mm)			
	Power Consumption (W)	22	52	65	75	85	
Power	Input Voltage		ļ	AC110~240V (50Hz~60H	z)		
Mechanical	Unit Size (WxHxD mm)	590x383x50	814x504x69	1048.9x636.9x64.7	1186.6x716.6x65	1319.6x790.6x6	
	Package Size (WxHxD mm)	725x525x210	955x630x230	1180x772x230	1350x865x260	1480x950x250	
	VESA Holes (mm)	100x100 400x200					
	Net Weight (kg)	9.2	15.25	24.6	32.45	39.15	
	Gross Weight (kg)	11.45	17.7	29.4	38.95	46.75	
	Operating Temperature			0 °C to 50 °C	<u>.</u>	^	
F	Storage Temperature			-30°C to 60°C			
Environmental	Operating Humidity			10% to 80%			
	Storage Humidity			5% to 95%			
	CPU	Ir	tel® Atom™ (Quad-core	e) x5-Z8350 Processor (2	M Cache, up to 1.92 GF	łz)	
	RAM		2	GB (DDR3L-RS 1600MH	z)		
	Instruction Set			64-bit			
	Graphic Engine	Intel®	HD Graphics 400 (8th 0	Gen, Supports DirectX11.	2, OpenGL4.4 and Oper	nCL 2.0)	
	Hard Drive/Internal Memory (eMMC)			64GB			
Computer	USB			2 x USB 2.0			
	LAN			10/100/1000 Ethernet			
	Wi-Fi	802.11b/g/n					
	OS	Android 5.1.1 Windows® 8 /8.1 64-bit, Windows® 10 Pro 64-bit (licence purchased separately)					
	Other		No	accessible buttons or con	trols		
A	Included	R	emote Control, User Ma	nual, Power Cable, USB t	to USB Cable, Wi-Fi Aer	ial	
Accessories	Optional		Wall Mount, Floo	or Stand/Trolley, Ceiling N	Iount, Table Stand		
	Warranty Period			3 Year Warranty			
Warranty	Technical Support			Lifetime			



PCAP Touch Screen Kiosks with Dual OS

43" | 50" | 55"





10 TOUCH POINTS DUAL OS THUCH Hingh Heets

All in One Touch Kiosk

Combining edge-to-edge glass PCAP technology with a stylish and secure kiosk. The ergonomic design, along with the built in dual OS PC and facility to seamlessly use a third party PC, sets this solution apart from other touch screen kiosks.



10 Point PCAP Touch

Having up to 10 touch points allows you to manipulate images, zoom in an out as well as perform many other touch gestures; much like you would with a domestic tablet. It also allows for multiple users interacting with the screen at one time.





Dual OS - Windows & Android

Both Android and Windows operating systems are installed on the integrated PC for ultimate flexibility. These displays provide a fully integrated solution - whether your application calls for Android or Windows.



Surface Plasma Treatment

The oleophobic coating makes the glass front more resistance to oil and water residue left by fingerprint marks and makes touch gestures smoother. Unlike other touch screens the glass is not etched, vastly improving the optical clarity.



LANDSCAPE OR PORTRAIT ORIENTATION

WI-FI AND LAN












None Treated Touch Screen

PCAP Surface Plasma Treated Touch Screen




450cd/m² IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature when used in either landscape or portrait.



Internal Locker

Should you need to connect the screen to an external source, like a PC or media player, you can use the USB and HDMI or VGA inputs and hide the player inside the internal locker.



Giant Tablet Styling

Their tempered edge-to-edge glass face, rounded corners, super slim profile and aluminium surround all add to the captivating tablet-like aesthetics as well as protecting the internal components from potential damage.



Integrated Speakers

The displays feature two integrated slimline speakers for applications that require an audio element.



24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.



Rear Connections

Whether you are using the integrated PC or a third party device inside the internal locker you can use the connections on the rear to conveniently connect your USB, Ethernet cable, power cable and Wi-Fi aerial directly to the touch screen.



Landscape or Portrait Orientation

The 43" and 50" models can be installed in portrait orientation as well as landscape; transforming the kiosk into an even more eye-catching display.



Touch CMS

For a small charge you can take advantage of our user-friendly CMS, allowing you to conveniently create your own interactive content. For more information please go to page 119.



		43 Inch	50 Inch	55 Inch		
	Resolution		1920×1080			
	Display Area (mm)	942.5x530.5	1076x606	1211x682		
	Aspect Ratio		16:9			
Panel	Brightness (cd/m ²)	450				
	Colour	16.7M				
	Viewing Angle		178°			
	Contrast Ratio		5000:1			
	Touch Technology		Projected Capacitive			
Touch	Touch Points		10			
	Glass Hardness		7H minimum			
Audio	Speaker Type		2W, 5Ω (x2)			
	Inputs (when used as monitor)		HDMI, VGA, RS-232			
AV Inputs/Outputs	Audio Input (when used as monitor)		Audio Socket (3.5mm)			
	Audio Output (Internal PC)	Audio Socket (3.5mm)				
2	Power Consumption (W)	65	75	85		
Power	Input Voltage					
	Unit Size (WxHxD mm) (Landscape)	1048.9x636.9x64.7	1186.6x716.6x65	1319.6x790.6x65		
Mechanical	Package Size (WxHxD mm)	Box 1:1003x678x435 Box 2: 1180x772x230	Box 1:1003x678x435 Box 2: 1350x865x260	Box 1:1003x678x435 Box 2: 1480x950x250		
	Footprint (WxD)	800x500				
	Net Weight (kg)	74	81.5	88.15		
	Gross Weight (kg)	81.6	91.1	99		
	Operating Temperature		0 °C to 50 °C			
For the second state	Storage Temperature		-30°C to 60°C			
Environmental	Operating Humidity		10% to 80%			
	Storage Humidity	5% to 95%				
	CPU	Intel® Atom™ (Qu	ad-core) x5-Z8350 Processor (2M Cache	e, up to 1.92 GHz)		
	RAM		4GB (DDR3L-RS 1600MHz)			
	Instruction Set		64-bit			
	Graphic Engine	Intel® HD Graphics 40	0 (8th Gen, Supports DirectX11.2, Open	GL4.4 and OpenCL 2.0)		
	Hard Drive/Internal Memory (eMMC)		64GB			
Computer	USB		2 x USB 2.0			
	LAN		10/100/1000 Ethernet			
	Wi-Fi	802.11b/g/n				
	OS	Android 5.1.1, Windows® 8 /8.1 64-bit, Windows® 10 Pro 64-bit (licence purchased separately)				
	Other	No accessible buttons or controls				
Accessories	Included	Remote Control, U	Jser Manual, Power Cable, USB to USB C	able, Wi-Fi Aerial		
N/a man h	Warranty Period		3 Year Warranty			
Warranty	Technical Support		Lifetime			



Infrared Freestanding Multi Touch Screen Posters with Dual OS 50" | 55"

Key Features




Dual OS - Windows & Android

Both Android and Windows operating systems are installed on the integrated PC for ultimate flexibility. These displays provide a fully integrated solution - whether your application calls for Android or Windows.



450cd/m² IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature in portrait orientation.



10 Point Infrared Touch

Having up to 10 touch points allows you to manipulate images, zoom in an out as well as perform many other touch gestures; much like you would with a domestic tablet. It also allows for multiple users interacting with the screen at one time.



Internal Locker

Should you need to connect the screen to an external source, like a PC or media player, you can use the USB and HDMI or VGA inputs and hide the player inside the internal locker.









NO EXTERNAL PC REQUIRED

WI-FI AND LAN













IPS PANEL

24/7 COMMERCIAL GRADE



ATTACH DEVICES








Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in portrait orientation.




Multiple Inputs

If the integrated PC is not powerful enough for your application you can connect an external PC or media player, via HDMI or VGA for the AV signal and USB for the interactivity.



Giant Tablet Styling

The steel enclosure has a super slim profile and rounded corners to add to the captivating tablet-like aesthetics as well as protecting the internal components from potential damage.



White Version Available

A stylish white version of the Infrared Freestanding Multi Touch Screen Poster is available in both 50" and 55.



24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.



Integrated Castors

These freestanding displays are a fully potable solution as they feature integrated castors as well as retractable feet for more permanent installations.



Integrated Speakers

The displays feature two integrated slimline speakers for applications that require an audio element.



Touch CMS

For a small charge you can take advantage of our user-friendly CMS, allowing you to conveniently create your own interactive content. For more information please go to page 119.



		50 inch	55 inch		
	Resolution	1080x	1920		
	Display Area (mm)	625.4x1106.4	686.4x1215.8		
	Aspect Ratio	16:9			
Panel	Brightness (cd/m²)	450			
	Colour	16.7M			
	Viewing Angle	178°			
	Contrast Ratio	5000:1			
	Touch Technology	Infra	red		
Touch	Touch Points	10)		
	Glass Hardness	7H min	imum		
Audio	Speaker Type	2W, 50	2 (x2)		
	Video	HDMI, VGA			
AV Inputs	Audio	Audio Socke	et (3.5mm)		
-	Power Consumption (W)	105	125		
Power	Input Voltage	AC110~240V	(50Hz~60Hz)		
	Unit Size (WxHxD mm)	1850x766x79.5 1947x827			
	Package Size (WxHxD mm)	2000x920x565 2100x900x53			
lechanical	Footprint (WxD)	779x400 840x400			
	Net Weight (kg)	72 93			
	Gross Weight (kg)	82 103			
	Operating Temperature	0 °C to	50 °C		
	Storage Temperature	-30°C to	o 60°C		
Environmental	Operating Humidity	10% to	80%		
	Storage Humidity	5% to	95%		
	CPU	Intel® Atom™ (Quad-core) x5-Z8350 F	Processor (2M Cache, up to 1.92 GHz)		
	RAM	4GB (DDR3L-F	RS 1600MHz)		
	Instruction Set	64-1	bit		
	Graphic Engine	Intel® HD Graphics 400 (8th Gen, Supports	DirectX11.2, OpenGL4.4 and OpenCL 2.0)		
	Hard Drive/Internal Memory (eMMC)	640	βB		
Computer	USB	2 x US	B 2.0		
	LAN	10/100/100	0 Ethernet		
	Wi-Fi	802.11	b/g/n		
	OS	Android 5.1.1, Windo Windows® 10 Pro 64-bit (lic			
	Other	No accessible but	tons or controls		
Accessories	Included	Remote Control, User Manual, Power C	Cable, USB to USB Cable, Wi-Fi Aerial		
40003301103	Warranty Period	3 Year Warranty			





4K Slim Bezel Interactive Touch Displays

55" | 65" | 75" | 86"



Modern Interactive Whiteboard


The stylish enclosure design really makes this touch screen stand out from the crowd. The bezels are so thin that the display area occupies more than 91% of the overall screen size. Designed with aluminium bezels and a moulded polymer rear, the screen is so lightweight it can even be mounted on a stud wall.



4K Display

The 4K Ultra HD display delivers incredible image quality with four times resolution higher than Full HD. Optimised for viewing distances both near and far the display allows your content to take center stage for all your visual communication.



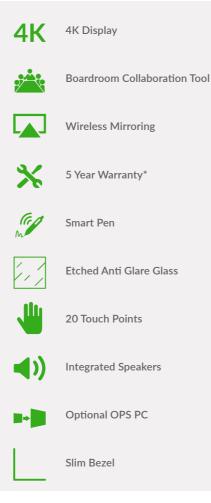

Introducing **MEETINGPAD: The Ultimate Collaboration Tool**

Multi-Device Wireless Mirroring

Wirelessly project the displays of up to four smartphones, tablets, laptops, PCs or Macs. Using mobile devices you can mirror the display in both directions, and even take control of the touch screen. Mirroring via 5GHz allows for fast response, all without the need of external wires or transmitters.



Flexible Working Tools

Personalise your experience by changing the background colour of the display, as well as the colour and thickness of your drawing tools.

Smooth Annotations

The line thickness of your annotations varies depending on pressure and speed, allowing you to achieve a realistic and natural handwriting experience.






Smart Pen Stylus

There are two stylish interactive 'Smart Pens' included. These special styluses allows you to control the display wirelessly from anywhere in the room. You can change the pen tool colour, save annotated documents, navigate through a PowerPoint presentation or website and go back to the 'MeetingPad' home screen.



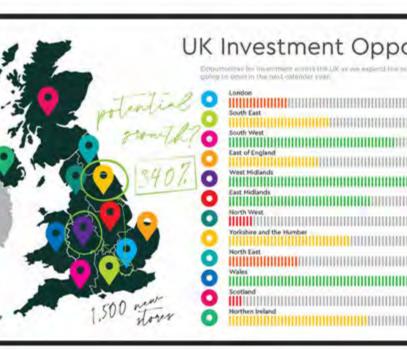

Easy File Sharing

Once your device is connected you can quickly and easily share documents, videos, images and audio files stored on your smartphone, tablet, laptop or PC directly to the touch screen. You can also share files from the touch screen to your device via email or by scanning a QR code with your mobile or tablet.





ConnectShare Dongle

Quickly and conveniently mirror from your PC, laptop or Mac using the ConnectShare Dongle. Just insert it and launch the built in software, without the need to install any applications.


Optional OPS Windows PC

For seamless integration onto existing networks an OPS PC can be installed into the rear of the display, allowing for ultimate flexibility to switch between Android and Windows effortlessly.



Touch Screen Monitor

As well as using the built in Android system these displays can also be used as a touch screen monitor by connecting a PC or laptop via HDMI and USB. There is also a HDMI out to duplicate the touch screen display to a second monitor.



Easy Access Ports and Controls

As well as having a power and standby button there are also two front facing USB ports. These are ideal for quickly and conveniently connecting USB sticks containing files that you need to access from MeetingPad or the optional OPS PC.



Freeze Frame Function

While your laptop is connected you can freeze the image on screen so that you can continue to work independently on your laptop.



20 Touch Points

Ideal for large group collaboration, up to twenty users can interact with the screen simultaneously when working on group projects.




Slim Bezel

The screens feature an extremely sleek and narrow bezel meaning that the enclosure to display area ratio is very low. The front is crafted from segmented aluminium to achieve ultimate precession while the polymer rear keeps the display super slim and lightweight.



Etched Glass

Improves tactility for smoother touch gestures, especially useful for multiple users. The anti-glare nano coating also diffuses external light improving optical clarity.





Integrated Speakers

The screens have two integrated super slim 10W speakers for presentations that include an audio element.

New 30 Sec TV Commercia



		55 Inch	65 Inch	75 inch	86 inch		
	Resolution		3840	x2160			
	Display Area (mm)	1209.6x680.4	1428.48x803.52	1651.74x929.76	1896x1067		
	Aspect Ratio	16:9					
	Brightness (cd/m ²)	500					
Panel	Colour		1.070	colors			
	Colour Depth		8	Bit			
	Viewing Angle		17	78°			
	Contrast Ratio		500	00:1			
	Lifespan		80,000) Hours			
	Touch Technology		Infr	ared			
	Touch Points		20 (10 Touch Points in	MeetingPad Software)			
	Glass Hardness		7H mi	nimum			
Touch	Response Time		≤5	ims			
	Touch Point Accuracy			5mm			
	Touch Resolution			x32768			
Audio	Speaker Type			×10W 8Ω			
	Front Inputs		USI	3 x 2			
AV Inputs/Outputs	Rear Inputs	HDMI-In x 2, Audio In, USB x 2, TF Card, RS232					
	Outputs	Touch USB (Type B), Audio Out, HDMI-Out					
	Power Supply	AC110~240V (50Hz~60Hz)					
Power	Power Consumption	85W	140W	205W	380W		
	Unit Size (WxHxD mm)	1259x729.6x94.6	1485x862x75	1737x1011x78.1	1957.8x1131.7x99.		
	Package Size (WxHxD mm)	1437x845.6x186.6	1656x1020x230	1888x1155x223	2215x1360x360		
Mechanical	VESA Holes (mm)	400x200	400x400/400x600	600x560/600x760	800x600		
	Net Weight (kg)	27.6	40	57.35	60		
	Gross Weight (kg)	32.85	48	66.55	95.15		
	Operating Temperature			o 40 °C			
	Storage Temperature	-10°C to 60°C					
Environmental	Operating Humidity			to 85%			
	Storage Humidity			to 90%			
	CPU			Cortex-A53 1.4GHz			
	RAM		-	DDR3			
	Architecture			-bit			
	Graphic Engine			i T720mp2			
Computer	Hard Drive/Internal Memory (eMMC)			GB			
	USB			, USB 2.0 x3			
	LAN			Ethernet			
	Wi-Fi						
	OS	802.11b/g/n/ac Android 6.0					
Accessories	Included		Control, Power Cable, LAN Ca Fi Aerial (x2), HDMI Cable, M	able, USB A Male to USB A Ma			
	Optional			d/Trolley, Ceiling Mount			
	Warranty Period		5 Year Onsite Warran	ty (UK Mainland Only)			
Warranty	Technical Support		Life				




POS Android Advertising Displays 10" | 15"

Key Features



Power Over Ethernet (PoE)

Power your screen by using the power cable provided or supply the power over an Ethernet cable. This minimises the number of cables needed for installation as you can supply power and internet connectivity to the screen simultaneously.



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



24/7 Commercial Use


These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.



Free Scheduling Software

These displays come with free scheduling software for displaying different content at different times of the day. If you prefer to keep it simple you can update the screen directly without using the software.



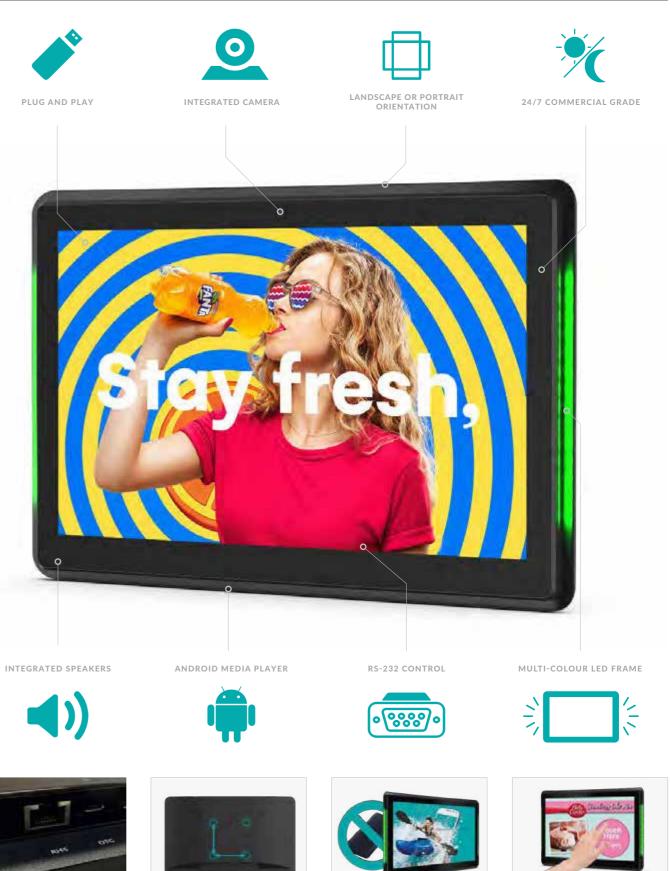









VESA MOUNTING HOLES

NO INTEGRATED BATTERY

84

TOUCH SCREEN UPGRADE

No Integrated Battery

Unlike domestic tablets these displays do not have built-in batteries and therefore last considerably longer. They are designed to be used constantly 24/7 in public spaces and can be powered directly from the mains or over PoE.



VESA Mounting Holes

Unlike domestic tablets these displays have an integrated and secure screw based mounting solution on the rear for easy wall or stand installation.



Integrated Camera

If the software you are using requires a camera you can use the screen's integrated front facing 2 megapixel camera.



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet.



Multi Coloured LED Frame

The LED edges either side of the display can be red, green or blue. They can also be disabled completely if preferred.



Meeting Room Solution

This display is ideal to be used in conjunction with meeting room booking software. The LED frame can act as a room availability indicator.



15" Model Available

A larger 15" Model of the POS Display is also available.



Touch Screen Upgrade

You can upgrade your display to be a PCAP touch screen to add the element of interactivity; increasing audience engagement.



		10 Inch	15 Inch		
	Resolution	1280x800	1920×1080		
	Display Area (mm)	216.96x135.6	345x194		
	Aspect Ratio	16:10	16:9		
Denel	Brightness (cd/m ²)	450			
Panel	Colour	16.7M			
	Colour Depth	10 Bit			
	Viewing Angle	178°	,		
	Contrast Ratio	800:1			
Audio	Speaker Type	2x2W	2x1.5W		
	Video	Micro USB, 1x USB	3.0, 1x USB 2.0		
AV Inputs	Audio	Audio Socket	: (3.5mm)		
	Power Consumption (W)	ТВС	ТВС		
Power	Input Voltage	12V/2	2A		
	PoE Mode	48V Pas	sive		
	Unit Size (WxHxD mm)	273.7x189.7x30.2	401.8x252.9x30.2		
	Package Size (WxHxD mm)	368x234x75	493x303x70		
Mechanical	VESA Holes (mm)	75x75 100x100			
	Net Weight (kg)	0.75 TBC			
	Gross Weight (kg)	1.15	TBC		
	Operating Temperature	0 °C to 50 °C			
	Storage Temperature	-30°C to 60°C			
Environmental	Operating Humidity	10% to 80%			
	Storage Humidity	5% to 95%			
	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)			
	Media Resolution	1920x1080/1	080x1920		
	CPU	Quad-core Cortex-A17 1.8	GHz,RockChip RK3288		
	GPU	Mali-T7	764		
	RAM	2GB			
	ROM	16GB	8GB		
Computer	Storage Extension	SD Ca	rd		
	USB	USB3.0 HC	DST x1		
	Wi-Fi	802.11b	/g/n		
	LAN	100M/10	M000		
	Bluetooth	Bluetoot	h 4.0		
	OS	Android	8.1		
	Graphic Engine	OpenGL ES	1.1/2.0		
	Included	Wall Mc	ount		
Accessories	Optional	Network Upgrade, PCAP Touch Screen Upgrad	le, Table Stand, Near Field Communication		
	Warranty Period	3 Year Wa			
Warranty	Technical Support	Lifetin			

Errors and omissions excepted



Ultra Wide Stretched Displays

28" | 37"

Key Features



Ultra Wide Aspect Ratio

Display content in a unique stretched format with this versatile display. Ideal for a range of tall and narrow locations in applications like wayfinding and retail.



Ultra Wide Aspect Ratio

24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



Free Scheduling Software

These displays come with free scheduling software for displaying different content at different times of the day. If you prefer to keep it simple you can update the screen directly without using the software.









LANDSCAPE OR PORTRAIT ORIENTATION

CONNECT DEVICES







ULTRA WIDE ASPECT RATIO

PLUG AND PLAY







OPTIONAL NETWORK UPGRADE

NARROW BEZEL












24/7 COMMERCIAL GRADE

Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.



Scrolling Text

You can display a "ticker tape" style scrolling text message along the bottom of the screen, to help you get your message across or help highlight any specific promotions or offers.




Integrated Speakers

The displays feature two integrated slimline speakers for applications that require an audio element.



Landscape or Portrait Orientation

Thanks to their commercial grade panel these displays can be mounted in either landscape or portrait orientation and still retain a 178° viewing angle and remarkable image quality.




VESA Mounting Holes

These displays have an integrated and secure screw based mounting solution on the rear for easy installation.



Low Power Consumption

The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 70,000 hours and the power consumption is reduced by around 30%.



Multiple Inputs

Should you need to use the screen as a monitor you can connect it to an external source, like a PC or media player, using the HDMI input or the VGA and 3.5mm audio jack inputs.



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet. For more information please go to page 115.



		28 Inch	37 Inch	
	Resolution	1920x360	1920x540	
	Display Area (mm)	701.6x133	899.7x253	
	Aspect Ratio	16:3	32:9	
Panel	Brightness (cd/m ²)	700		
	Colour	16.7M	16.7M	
	Viewing Angle	89°	89°	
	Contrast Ratio	1200:1	4000:1	
Audio	Speaker Type	2W, 5Ω (x2)	
	Video	HDMI, VGA	λ.	
AV Inputs	Audio	Audio Socket (3.	5mm)	
Dowor	Power Consumption (W)	35	50	
Power	Input Voltage	DC 12V	AC100V-240V input	
	Unit Size (WxHxD mm)	735.1x168x29.5	918.1x284.4x39	
	Package Size (WxHxD mm)	308.6x877.1x128	308.6x877.1x128	
Mechanical	VESA Holes (mm)	75x75 75x75		
	Net Weight (Kg)	5.7 5.7		
	Gross Weight (Kg)	7.3 7.3		
	Operating Temperature	0°C to 40°C		
	Storage Temperature	-10°C to 60°C		
Environmental	Operating Humidity	10% to 85%		
	Storage Humidity	5% to 95%		
	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)		
	Media Resolution	1920x360	1920x540	
	Internal Memory	6GB		
	CPU	Quad-Core Cortex-A1	7@1.61GHz	
	GPU	Mali-T760 MP4 @d	500MHz	
Computor	RAM	2GB DDR3		
Computer	ROM	8GB NAND)	
	USB	USB2.0 HOST	(x2)	
	LAN	10/100M Ethernet (Netwo	rk Version Only)	
	Wi-Fi	802.11b/g/n/ac (Network	Version Only)	
	OS	Android 5.1.	1	
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1		
Accessories	Included	Scheduling Software, Remote C	Control, User Manual	
Accessories	Optional	Network Upgrade, Wall Mount, Floor Stand/	Trolley, Ceiling Mount, Table Stand	
	Warranty Period	3 Year Warrar	ntv	



LCD Shelf Edge Displays 21"



Digital Shelf Label

Transform lifeless shelf edge signage with these revolutionary LCD displays. Their ultra wide aspect ratio is perfect for integration into existing shelf edge systems. Compliment printed signage by adding motion and vibrancy.



24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.



Network Management Solution

You can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet and even split your screen into multiple zones. For more information go to page 115.



Synchronise Multiple Displays

Synchronise your content across multiple screens within the same display. You can achieve the effect of one large image or video across multiple screens or have content playing and transitioning in perfect unison.



		21 Inch	
	Resolution	1920x132	
	Display Area (mm)	529.02x36	
	Aspect Ratio	160:11	
Panel	Brightness (cd/m ²)	300	
	Colour	16.7M	
	Viewing Angle	89°	
	Contrast Ratio	1200:1	
	Power Consumption (W)	28	
Power	Input Voltage	DC 12V	
	Unit Size (WxHxD mm)	545.5x63x28	
Mechanical	Package Size (WxHxD mm)	TBC	
viecnanicai	Net Weight (Kg)	TBC	
	Gross Weight (Kg)	TBC	
	Operating Temperature	0°C to 40°C	
nvironmental	Storage Temperature	-10°C to 60°C	
	Operating Humidity	10% to 85%	
	Storage Humidity	5% to 95%	
	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)	
	Media Resolution	1920x132	
	Internal Memory	6GB	
	CPU	Quad-Core Cortex-A17@1.61GHz	
	GPU	Mali-T760 MP4 @600MHz	
Computor	RAM	2GB DDR3	
Computer	ROM	8GB NAND	
	USB	USB2.0 HOST (x2)	
	LAN	10/100M Ethernet (Network Version Only)	
	Wi-Fi	802.11b/g/n/ac (Network Version Only)	
	OS	Android 5.1.1	
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1	
Accessories	Included	Scheduling Software, Remote Control, User Manual	
ACCESSORIES	Optional	Network Upgrade	
	Warranty Period	3 Year Warranty	











WELCOME TO THE WORLD OF LED



What is an LED Video Wall?

Light-emitting diodes (LEDs) can be found in torches, lamps and the backlight of most LCD screens; essentially they are tiny light bulbs. LED Video Walls comprise of individual LEDs that light up with different colours to create an image; so think of each LED as a pixel. Our ranges of LED Video Walls use surface mounted device (SMD) technology, combining red, green and blue micro LEDs so each pixel can create a full range of colours. LED Video Walls have a modular design so they can be made to fit any space. Content is sent, usually from a media player, to a sending box which then distributes the image to each module and in turn each LED.



LED Video Walls VS LCD Video Walls


When thinking about Video Wall technology the major choice you will be faced with is whether LED or LCD is the way to go. Both have their unique advantages and strengths depending on your requirements, expectations and resources.

LED Video Wall Between each module and cabinet there are no seams across the entire display, creating a seamless display. Fill any space thanks to the smaller cabinet sizes and modular design, is not bound to 16:9 aspect ratio. Both indoor and outdoor options available. Ultra high contrast ratios achieve true blacks and an unbelievable colour range. Bespoke installation required. Robust, rugged enclosures. Unbelievable levels of brightness can be achieved, ideal for outdoor applications that need to compete with the sun. Can be accessed from front or rear making maintenance flexible and simple. 100,000 hours lifetime.

Premium solution.

Pixel Pitch


One factor to consider when planning your LED Video Wall project is viewing distance and how pixel pitch plays a part in this. Pixel pitch refers to the distance between each LED/pixel, so in a P6 LED Video Wall there would be 6mm between each pixel, both horizontally and vertically. This is why typically indoor LED Video Walls have lower pixel pitches when compared to outdoor LED Video Walls as you would expect outdoor displays to be viewed from a further distance. When deciding which pixel pitch is right for you, a general rule of thumb is the number after the "P" dictates the optimum viewing distance in meters. For example, the optimum viewing distance for a P6 LED Video Wall is 6 meters or more.

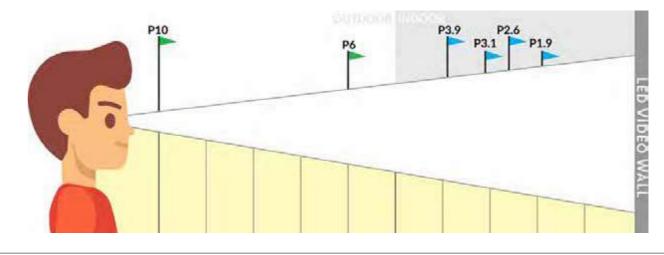

LCD Video Wall
Between each panel there is an ultra-narrow bezel that can be as thin as 3.5mm screen to screen.
As standard come in a fixed 16:9 aspect ratio, ideal for displaying High Definition content but more limiting.
Can only be used for indoor applications.
Smaller pixel pitch can potentially produce higher resolutions, depending on content and media player.
More user friendly hardware.
Very fragile LCD panels can be damaged easily during installation.
Designed specifically for indoor use so not available in high brightness.
Typically use pop-out wall mounts for serviceability.
70,000 hours lifetime.
Affordable option.


Content Management Systems

All Digital Signage solutions require a commercial display, a media player and a content management system; this theory is no different with an LED Video Walls. Just like with our LCD based Digital Signage solutions, we can provide an all-in-one LED Video Wall solution. By sourcing all of the necessary components from one supplier you can eliminate problems that arise when supporting and maintaining a solution from separate manufacturers and software suppliers. Our software is more streamlined and user-friendly, as we are not competing with traditional Digital Signage software companies who add an abundance of generally redundant features. Using over a decade of industry experience, research and development we have developed a content management system that works in sync with our LED Video Walls.

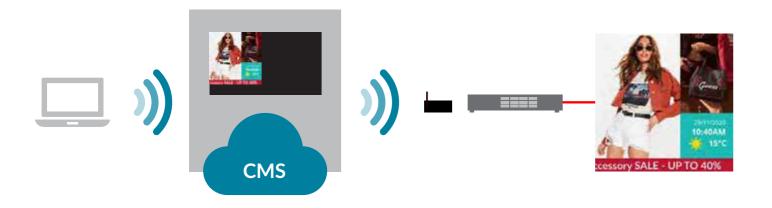

How Does an LED Video Wall Work?

An LED Video Wall is made up of several components. The first of which is the media player, which sends the content via HDMI to the sending box. The sending box processes this video signal and sends it to the receiving card of the first LED cabinet. Each cabinet, which is comprised of separate LED modules, is then daisy chained to one another using a CAT5 cable to carry this signal.

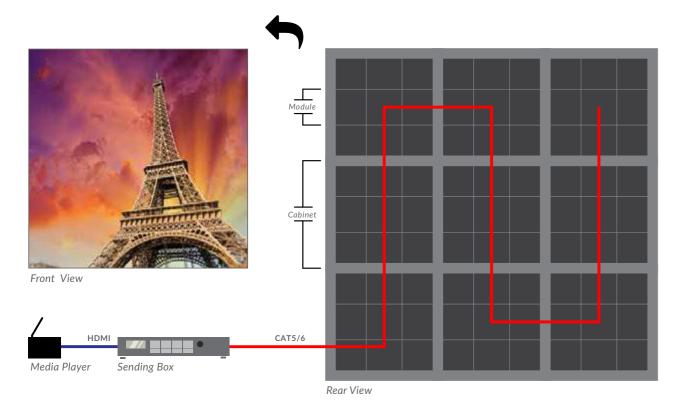

Indoor and Outdoor LED Video Walls

LED Video Walls allow you to deliver your message on a grand scale and can be a very powerful tool. LED technology allows you to create Video Walls for both indoor and outdoor applications. Iconic locations such as New York's Times Square and London's Piccadilly Circus are dominated by outdoor LED Video Walls and tourists flock to see the advertising displays. LED technology is versatile thanks to protective IP-rated enclosures that shield the display from all outdoor weather conditions. Another huge advantage of LED is brightness; when compared to LCD technology indoor LED Video Walls are also nearly twice as bright. Outdoor LED Video Walls are more than 12 times the brightness of most standard LCD Digital Signage displays to help them compete with direct sunlight.



Installation

Our LED Video Walls can be installed quickly and efficiently due to smart interlocking cabinets and secure magnets. When it comes to installation of an LED Video Wall there are multiple factors that need to be taken into account. Where is the LED Video Wall being mounted; is it going on a wall or a custom built freestanding structure? Is a structural engineer needed? Will extra equipment such as a cherry picker be required? Is the display a permanent install or a temporary rental? How much and what type of power going to be needed? We can provide as much support as necessary when it comes to the installation of your LED Video Wall.

Maintenance

LED is one of the most durable and reliable display technologies available but like any form of equipment it does need to be properly maintained to ensure optimum performance. The failure rate of LED is astonishingly low and even when it does occur the modules can be easily accessed and swapped out. The level of maintenance required can be mitigated by considering certain factors during the design and installation stage, such as making sure there is sufficient ventilation. LED Video Walls are not a 'fit and forget' type of technology and that is why we can offer maintenance packages where appropriate, so you can be sure your LED Video Wall is properly cared for and has a long lifetime of operation.



Indoor LED Video Walls P1.9 | P2.6 | P3.1 | P3.8

Key Features



SMD TECHNOLOGY



MODULAR DESIGN





QUICK AND EASY INSTALL



ALL-IN-ONE DISPLAY



HIGHER BRIGHTNESS DISPLAY



High Brightness

Equipped for all indoor ambient light conditions the 800cd/m2 high brightness display is sure to shine bright and demand your audience's attention.



Easy Front Maintenance

Stunning Image Quality


and vibrant colours with no distortion.

Through an intuitive and easy-to-use maintenance system the LED Video Wall can be serviced from the front of the display. The LED modules can be removed quickly and efficiently for convenient maintenance.

State of the art SMD-LED technology delivers stunning image

quality across the seamless display; certain to garner attention.

With advanced video processing technology to produce accurate



End-to-End Project Management

Every LED Video Wall is unique and each comes with its own challenges. We are here to advise and guide you through every step - from design to installation and even providing maintenance we can provide full end-to-end project management where required.





SEAMLESS VIDEO WALL



ULTRA HIGH CONTRAST RATIO



LOW HEAT EMISSIONS



FRONT SERVICEABILITY



EASY TO USE CMS



Specification Table

Lightweight and Slim Design

Each cabinet weighs just 24kg and has a depth of 40mm meaning that the reduced weight reduces stress on the mounting structure.



Fanless Design

The Indoor LED Video Walls are noise free while in operation thanks to their fanless design. Unlike outdoor applications, which involve lots of ambient noise, indoor projects require a silent solution.



Remote Updates from the Cloud

Take complete control of your LED Video Wall's content with our CMS system. Publish and monitor your content from anywhere in the world via our online portal.



Complete Quality Control

Every step, from production to installation, goes through a strict quality control procedure while quality calibration guarantees consistent image quality across the whole display.



Ultra High Contrast Ratio

With an ultra-high contrast ratio of 6,000:1 the LED Video Walls deliver deeper blacks, vivid colours and clear visibility across the display without sacrificing brightness.



Easy Installation

Their light and compact design as well as magnetic modules, positioning pins and simple cabinet structure make them ideal for either permanent installations or rental jobs.



Optimised Indoor Viewing Distances

The Indoor LED Video Walls are designed for close range viewing distances with a variety of pixel pitch options depending on your budget and requirements.



Bespoke Video Wall Display

Make the most of their modular design as you sculpt the LED Video Wall to fill your space and stand out from the crowd.



		P1.9	P2.6	P3.1	P3.9		
	Pixel Pitch (mm)	1.9mm	2.6mm	3.1mm	3.9mm		
	LED Type		Black SMD2020 3-in-1				
	Pixel configuration		1R10	G1B			
	Brightness (Calibrated)		800 ce	d/m2			
	Refresh rate		≥192	0 Hz			
ED Display	Contrast Ratio		600	0:1			
	Viewing angle - Horizontal		16	0°			
	Viewing angle - Vertical		160°				
	Processing		14 bit				
	Frame rate		60 fps				
	Maintenance		Front & Rear service				
	Module Resolution (px)	128x128	96x96	80x80	64x64		
	Module Size (mm)	250x250					
Cabinet	Cabinet Resolution (px)	256x256	192x192	160x160	128x128		
	Cabinet Size (mm)		500x500x80				
	Net weight (Kg)		20	6			
	Input Voltage	AC220/110 ± 10%, 47~63Hz					
ower	Average Power Consumption		200W/m ²				
	Maximum Power Consumption		624V	V/m ²			
	IP Rating		IP4	40			
Environmental	Operating Temperature		-10°C to	o +40°C			
Livironmental	Operating Humidity		10% to 90%				
	Lifetime	100,000 hours					
Accessories	Included		ТВ	C			
40085501165	Optional		ТВ	C			
Marranty	Warranty Period		3 Year W	/arranty			
Warranty	Technical Support		Lifet	ime			





Outdoor LED Video Walls



Stunning Image Quality

State of the art SMD-LED technology delivers stunning image quality across the seamless display; certain to garner attention. With advanced video processing technology to produce accurate and vibrant colours with no distortion.



IP Rated Weatherproof Enclosure

Designed with a robust aluminium enclosure to give protection from the all wet weather conditions. The outer casing is IP-rated which means it also keeps out airborne swarf, dust and other particles.







Each cabinet weighs 28kg and has a depth of 100mm making these screens much easier to install. The lighter weight reduces stress on the mounting structure.



End-to-End Project Management

Every LED Video Wall is unique and each comes with its own challenges. We are here to advise and guide you through every step - from design to installation and even providing maintenance we can provide full end-to-end project management where required.



Design >> Installation >> Maintenance

Key Features





SMD TECHNOLOGY











QUALITY



101



NSTALLATION

Specification Table

Outstanding High Brightness

With an incredible brightness level of 6,000cd/m2 the LED Video Wall has outstanding visibility. The display is sunlight readable even in direct sunlight instantly catching attention from viewers ensuring your content is always seen.



Optimised Outdoor Viewing Distances

The Outdoor LED Video Walls are designed for longer viewing distances with multiple pixel pitch options depending on your budget and requirements.



Remote Updates from the Cloud

Take complete control of your LED Video Wall's content with our CMS system. Publish and monitor your content from anywhere in the world via our online portal.



Ultra High Contrast Ratio

With an ultra-high contrast ratio of 6,000:1 the LED Video Walls deliver deeper blacks, vivid colours and clear visibility across the display without sacrificing brightness.



Front or Rear Maintenance

Through an intuitive and easy-to-use maintenance system the LED Video Wall can be serviced from either the front of the display or the rear. The LED modules can be removed quickly and efficiently for convenient maintenance.



Easy Installation

Their light and compact design as well as magnetic modules, positioning pins and simple cabinet structure make them ideal for either permanent installations or rental jobs.



Complete Quality Control

Every step, from production to installation, goes through a strict quality control procedure while quality calibration guarantees consistent image quality across the whole display.



Optional Ambient Light Sensor

Ensure that the brightness of your video wall is always at an optimum level. This feature is ideal for displays that are road facing; which need to have variable brightness depending on the time of day.



		P6	P10	
	Pixel Pitch (mm)	6.67mm	10mm	
	LED Type	SMD 2727 3-in-	-1	
	Pixel configuration	1R1G1B		
	Brightness (cd/m²)	≥6,000		
LED Display	Refresh rate	≥1920 Hz		
	Contrast Ratio	6,000:1		
	Viewing angle - Horizontal	140°		
	Viewing angle - Vertical	140°		
	Processing	14 bit		
	Frame rate	60 fps		
	Maintenance	Front & Rear Acc	ess	
Cabinet	Cabinet Size (mm)	960x960x120		
	Net Weight (Kg)	28		
	Input Voltage	AC220/110 ± 10%, 4	7~63Hz	
Power	Average Power Consumption	265W/m ²		
	Maximum Power Consumption	750W/m ²		
	IP Rating - Front	IP65		
	IP Rating - Rear	IP54		
Environmental	Operating Temperature	-20°C to +50°C	с	
	Operating Humidity	10% to 95%		
	Lifetime	100,000 hours		
A	Included	TBC		
Accessories	Optional	TBC		
	Warranty Period	3 Year Warrant	у	
Warranty	Technical Support	Lifetime		



Fine Pitch LED Presentation Video Walls


110" | 138" | 165" | 220"

Key Features



Super Fine HD Pixel Pitch

All the screen sizes available have a full High Definition resolution and a standard 16:9 aspect ratio. This fine pixel pitch, combined with the advantage of not having any unsightly bezels, make these displays the ultimate in premium presentation video walls.



Powerful Presentation Display

Designed with middle to large sized meeting rooms in mind this is the ultimate presentation tool. Wow attendees as you wirelessly mirror and file share between your devices and the presentation screen. Featuring easy access front ports for connecting your laptop, remote video conferencing and multi-window splicing for maximum user engagement.



All-in-One Meeting Room Display

The Fine Pitch LED Presentation Video Wall combines the best quality LED technology on the market with a sophisticated Android based PC. This provides an integrated solution for most cases without the need for messy cables or additional devices.



Easy installation

Installation of the Fine Pitch LED Presentation Video Wall is quick and easy thanks to its light and compact design. Unlike other LED Video Walls this solution is a complete out-ofthe-box display so assembly is much easier than usual. It also comes fully colour celebrated.








SMD TECHNOLOGY

SLIM/LIGHTWEIGHT DISPLAY

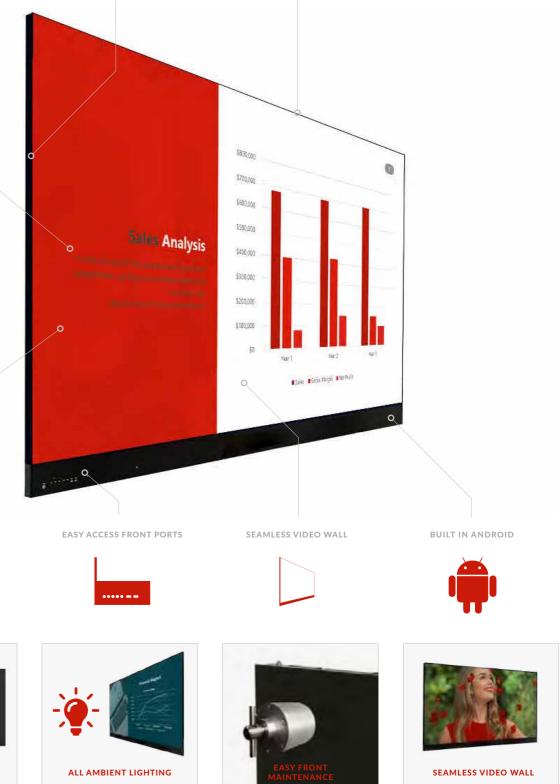

HD DISPLAY







ALL-IN-ONE DISPLAY











PRE COLOUR CALIBRATED

Specification Table

Adjustable Backlight

The Fine Pitch LED Presentation Video Wall is bright enough for all ambient lighting conditions, but the screen can be adjusted manually to suit user preferences. If your conference or meeting room is quite dark then you can reduce the backlight brightness to improve overall readability.



SMD Technology

SMD (Surface Mounted Diode) LED technology is the optimum form for LED Video Walls. Combining three miniature LEDs of different colours in one unit enables fine pixel pitches with perfect colour uniformity.



Wide Viewing Angle

Thanks to the LED technology these displays provide fantastic image quality with a remarkable viewing angle of 160°.



Advertising Display Functionality

Although it's designed as a presentation solution, this LED Video Wall can also be used as an indoor LED advertising display thanks to the built in Android PC.



Easy Front Maintenance

Through an intuitive and easy-to-use maintenance system the LED Video Wall can be serviced from the front of the display. The LED modules can be removed quickly and efficiently for convenient maintenance.



Lightweight and Slim Design


Despite their large size the Fine Pitch LED Presentation Video Wall has a compact design with a slim depth of just 38.5mm* and a lightweight cabinet for reduced stress on the mounting wall.



*Excludes 220" Model

Easy Access Front Ports and Controls

The Fine Pitch LED Video Wall has a variety of easy to access controls and ports on the front of the display including a HDMI and 2 x USB ports.



Optional Floor Stand

If you do not have the desired wall space available an optional floor stand can be included to mount the LED Video Wall on.



		110 Inch	138 inch	165 inch	220 inch			
	Pixel Pitch (mm)	1.2	1.5	1.9	2.5			
	Resolution		1920x1080					
	Display Area (mm)	2440x1373	3050x1716	3660x2059	4880x2745			
	Aspect Ratio		16:9					
1.50	Brightness (cd/m²)	100	~500	100,	~600			
LED	Refresh Rate (Hz)		1920~	·3840				
	Grayscale		14 Bit					
	Viewing Angle		16	0°				
	Contrast Ratio		500	0:1				
	Maintenance		Front Acc	ess Only				
AV Inputs	Front Inputs		USB x 2	, HDMI				
	Input Voltage		(50Hz~60Hz)					
Power	Average Power Consumption	850W	1,020W	1,040W	1,740W			
	Maximum Power Consumption	2,500W	3,000W	3,060W	5,120W			
	Unit Size (WxHxD mm)	2453x1503x38.5	3063x1846x38.5	3673x2189x38.5	4893x2875x60			
	Package Size (WxHxD mm)	TBC	TBC	TBC	TBC			
Mechanical	VESA Holes (mm)	400x400/400x600	600x600/600x800	800x600	800x600			
	Net Weight (kg)	134	201	282	562.5			
	Gross Weight (kg)	TBC	TBC	TBC	TBC			
	Operating Temperature		-10°C t	o 40 °C				
Environmental	Operating Humidity		10% to	o 85%				
	IP Rating		IP30					
	CPU		ARM Cortex A72, C	Cortex A53, 2.0GHz				
	GPU		ARM Mali-	T860 MP4				
	Memory		DDR3 :	2G, 4G				
Computer	Storage		eMM	C 8G				
	LAN		100M/	1000M				
	Wi-Fi		802.11ac					
	OS		Android 7.1					
	Included		TE	C				
Accessories	Optional		Floor	Stand				
14/	Warranty Period		3 Year V	/arranty				
Warranty	Technical Support		Lifet	ime				





Convert Existing Displays

For applications where there is already a display in place, these players are ideal for transforming them into USB updatable displays.



Android Media Player

Thanks to their Android operating system, these players are more easily updateable and faster than ever before. They can also be upgraded to the network version so that you can update content over the internet.




Plug and Play

Plug and Play is the most straightforward update method. Simply load images and videos on a USB stick, insert in the player, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



Multiple Outputs

Connect the media player to your existing screen via HDMI or VGA and 3.5mm audio jack depending on your display's inputs.



		Standalone Android Media Player	
	Video	HDMI, VGA	
AV Outputs	Audio	Stereo Analog Audio Socket (3.5mm)	
	Power Consumption (W)	<5	
Power	Input Voltage	AC110~240V (50Hz~60Hz)	
	Unit Size (WxHxD mm)	162.5x103x35	
Mechanical	Package Size (WxHxD mm)	237.5x165x129	
viecnanicai	Net Weight (kg)	0.35	
	Gross Weight (kg)	0.55	
	Operating Temperature	0 °C to 50 °C	
	Storage Temperature	-30°C to 60°C	
Environmental	Operating Humidity	10% to 80%	
	Storage Humidity	5% to 95%	
	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)	
	Media Resolution	1920x1080/1080x1920	
	Internal Memory	6GB	
	CPU	Quad-Core Cortex-A17@1.61GHz	
	GPU	Mali-T760 MP4 @600MHz	
Computer.	RAM	2GB DDR3	
Computer	ROM	8GB NAND	
	USB	USB2.0 HOST (x2)	
	LAN	10/100M Ethernet (Network Version Only)	
	Wi-Fi	802.11b/g/n/ac (Network Version Only)	
	OS	Android 5.1.1	
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1	
Accessories	Included	HDMI Cable, Scheduling Software, Remote Control, User Manual	
N/	Warranty Period	3 Year Warranty	
Warranty	Technical Support	Lifetime	

24/7 Commercial Use

Commercially graded high quality components are used in the design of the media player to ensure that it can be in constant use 24/7. Unlike domestic players, or DVD players, this unit is purpose built to run constantly and is extremely robust.



Free Scheduling Software

For more advanced use you can take advantage of the free scheduling software, allowing you to display different content at certain times of the day. You can also add scrolling text and set image duration and transition effects.



Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your media player. The ability to power on and off automatically means that the media player is only in use when it needs to be; improving your environmental efficiency.



High Definition 1080p

When connected to your display via HDMI you can achieve crystal clear full HD resolution images and videos.



Key Features





ucks Veranda Blend - £2.90 Hor

Convert Existing Displays

For applications where there is already a display in place, these players are ideal for transforming them into networked displays.

Update Instantly and From Anywhere

No special software installation or dedicated PC is required, simply login to our online your portal and update your player from anywhere in the world with an internet connection.



Android Media Player


Thanks to their Android operating system, these players are more easily updateable and faster than ever before as well as offering benefits such as displaying live webpages.





Connectivity

Connect the media player to your network using an Ethernet cable or over Wi-Fi. There is also a 4G option available for applications that require a dedicated network.

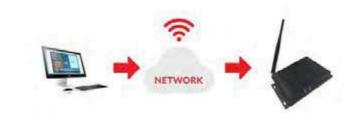

REMOTE FUNCTIONS













CREATE CUSTOM LAYOUTS

SCHEDULE PLAYLISTS



POWER TIMER

MULTIPLE AV OUTPUTS









Cloud Based Software

No need to install software to your PC or have your own dedicated server, our cloud-based CMS portal can be accessed instantly from anywhere in the world.



Schedule Playlists

Either publish immediately or choose your own times and dates in the future for your content to display. You can schedule content as far into the future as you like.



Remote Player Functions

Send commands to reboot your player, format the internal memory, stop and start content playback, adjust the volume; almost anything you can do with the remote control. Retain full control of your player from anywhere in the world.



Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your media player. The ability to power on and off automatically means that the media player is only in use when it needs to be; improving your environmental efficiency.



Create Custom Layouts

Design your own layouts in any orientation, with different zones for your background, images, videos, text, RSS feeds, time, date, local weather and live webpages.




24/7 Commercial Use

Commercially graded high quality components are used in the design of the media player to ensure that it can be in constant use 24/7. Unlike domestic players, or DVD players, this unit is purpose built to run constantly and is extremely robust.



Multiple Outputs

Connect the media player to your existing screen via HDMI or VGA and 3.5mm audio jack depending on your display's inputs.

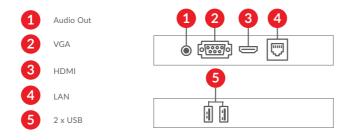

Works Offline

Media files are downloaded and stored on the internal memory; meaning that even when not connected to the internet it will display the scheduled content. You can even update via USB stick if there are any network problems.



		Android Cloud Network Media Player		
AV Outputs	Video	HDMI, VGA		
	Audio	Stereo Analog Audio Socket (3.5mm)		
Power	Power Consumption (W)	<5		
	Input Voltage	AC110~240V (50Hz~60Hz)		
Mechanical	Unit Size (WxHxD mm)	162.5x103x35		
	Package Size (WxHxD mm)	237.5x165x129		
	Net Weight (kg)	0.35		
	Gross Weight (kg)	0.55		
	Operating Temperature	0 °C to 50 °C		
nvironmontal	Storage Temperature	-30°C to 60°C		
Environmental	Operating Humidity	10% to 80%		
	Storage Humidity	5% to 95%		
	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PN		
	Media Resolution	1920x1080/1080x1920		
	Internal Memory	6GB		
	CPU	Quad-Core Cortex-A17@1.61GHz		
Computer	GPU	Mali-T760 MP4 @600MHz		
	RAM	2GB DDR3		
	ROM	8GB NAND		
	USB	USB2.0 HOST (x2)		
	LAN	10/100M Ethernet (Network Version Only)		
	Wi-Fi	802.11b/g/n/ac (Network Version Only)		
	OS	Android 5.1.1		
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1		
Accessories	Included	HDMI Cable, Scheduling Software, Remote Control, User Manual		
	Warranty Period	3 Year Warranty		
Warranty	Technical Support	Lifetime		

Errors and omissions excepted



Network CMS Content Management System Overview

Our Content Management System allows anybody to design and schedule content, regardless of their technical knowledge or resources. The easy to use interface puts the power in your hands to build your own content that your audience will love to engage with. Use your pre-existing images, videos and websites as you create your custom layouts. Deploy your content to anywhere in the world with just the push of a button. You can also send remote commands, designate specific user privileges, schedule your content to appear at set times and dates and even preview your content from the comfort of your PC.

Static Text

Allows you to input custom text values. Edit the font, colour and size of your text.

Images Multiple images playing in a

continuous rolling loop

Webpages Allows you to media page of

Videos Multiple videos playing in a continuous rolling loop.

Backgrounds


Set an image or a colour to frame your media zones.

Time

Display the time in a variety of formats, sizes and in whatever colour you want.

Date

Display the date in a variety of formats, sizes and in whatever colour you want.

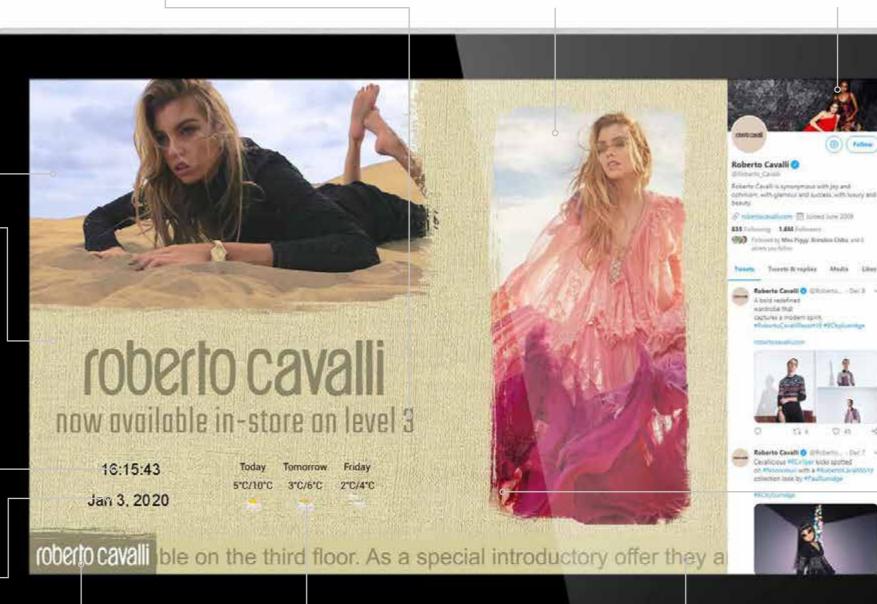

Logo

Brand your layout with your logo which will stay on top of all other zones.

Weather Widget

Display a real time weather forecast for up to the next three days.

Scrolling Text

Display a ticker tape message or live RSS feed. From here you can adjust the font, size, colour, speed and direction of the text.

Allows you to display a live webpage such as a social media page or live web feed.



Office Documents & PDF's

Display PDF files alongside Microsoft Word, Excel and PowerPoint files.

Image Overlay

Add an image with transparent sections as a top layer to give the other media zones a frame.

Easy To Use

With our intuitive CMS you can send content from your PC to your display or media player in a matter of seconds using a userfriendly drag-and-drop system.



Flexible and Scalable/ Deploy Globally

Using a wide range of screens and media players you can scale any project with absolute confidence. You can even integrate third party software via a URL.



Multi Zone Layouts

Design your own layouts in any orientation, with different zones for your background, images, videos, scrolling and static text, RSS feeds, time, date, local weather and live webpages.



Layer Management

Build multi-layered templates with background images or colours with image and video zones on top. Even add an image overlay with transparent sections to allow your content to shine through.



Full Integrated Solution

Our CMS software has been specifically designed to be used with the screens and media players that we manufacture; providing an all-in-one integrated solution.



Secure Cloud Based Software

No need to install any software or have your own dedicated server, our cloud-based CMS portal can be accessed from anywhere in the world and gives you free unlimited storage space.



Fully Customisable Content

Select exact colours from the palette or a HEX code to modify the background, scrolling text, static text, time, date and weather. You can also choose from 24 different transition styles between images.



Multi Screen Synchronising

Synchronise your content across multiple screens in the same location. You can achieve the effect of one large image or video across multiple screens or have the same content playing and transitioning in perfect unison.




Widgets

Alongside your media zones you can display the local time and date, various styles of weather forecasts, any social media feed and even live traffic updates.



User Management

Create and manage as many user accounts as you like, even customise the privileges for each user based on what screens you want them to have access to and what features of the CMS are unlocked.



Reports and Logs

View and export records of user activity as well as communication between screens and the CMS server. You can even export proof of play records to show how many times any given piece of media has played within a specific period.



Compatible Products

Our versatile and user-friendly Content Management System is available on a wide range of screens, providing an integrated all-in-one solution, as well as media players so that existing screens can be updated and managed using the same software.

Android Advertising Displays	_{pg} 07	Android Freestanding Digital Posters	pg 11	Network Digital Menu Boards	Pg 15	High Vibrance Advertising Displays	Pg 19
4K Large Format Commercial Displays	Pg 27	High Brightness Monitors	Pg 35	Ultra High Brightness Monitors	pg 39	Digital Rod Displays	_{Pg} 43
Hanging Double-Sided Window Displays	_{pg} 47	Outdoor Digital Advertising Displays	Pg 51	Outdoor Freestanding Digital Posters	pg 55	Outdoor Digital Android Battery A-Boards	Pg 59
Digital Android Battery A-Boards	pg 63	POS Android Advertising Displays	Pg 83	Ultra-Wide Stretched Displays	pg 87	LCD Shelf Edge Displays	Pg 91
Cloud Network Media Players	pg 111						

Schedule Playlists

Either publish immediately or choose your own times and dates in the future for your content to display. You can schedule content as far into the future as you like.



Works Offline

Media files are downloaded and stored on the internal memory; meaning that even when not connected to the internet it will display the scheduled content. You can even update via USB stick if there are any network problems.



Remote Commands

Send commands to reboot, format the internal memory, stop and start content, adjust the volume and even take a screenshot of what is playing. Retain full control of your screens from anywhere in the world.



Our Touch Content Management System allows anybody to design engaging interactive touch screen content without having to write a single line of code. Thanks to the easy-to-use interface the power is now in your hands to create and control content that your audience will love to interact with. Use your pre-existing images, videos and even your own website to design exciting touch content. Deploy your touch screen content to screens anywhere in the world with just the push of a button. You can also send remote commands, designate specific user privileges, schedule your content to appear at set times and dates and even preview and interactive with your content from your PC.

Buttons

Link your different pages together and trigger a host of different actions. Use buttons to prompt videos to start, launch websites, link to different pages or playlists and even launch Android compatible applications; all this without having to write any code. You can also utilise Button Groups to create and manage multiple buttons at once.

Branding

Insert your company's logo and use the company colours to completely personalise your Touch Screen Content.

Static Text

Allows you to input custom text _____values. Edit the font, colour and size of your text.

Image Overlay

Add an image with transparent sections as a top layer to give the other media zones a frame.to create a video gallery.

Weather Widget

Display a real time local weather forecast at a glance.

Time and Date


Display the time and date in a variety of different formats and choose exactly what colour you want to use.

Scrolling Text

Display a scrolling ticker tape message.

Backgrounds

Set a specific colour or use your own image as your background to frame your media zones. You can also design your entire interface, including buttons, as a background image and then place empty button zones over your graphics.

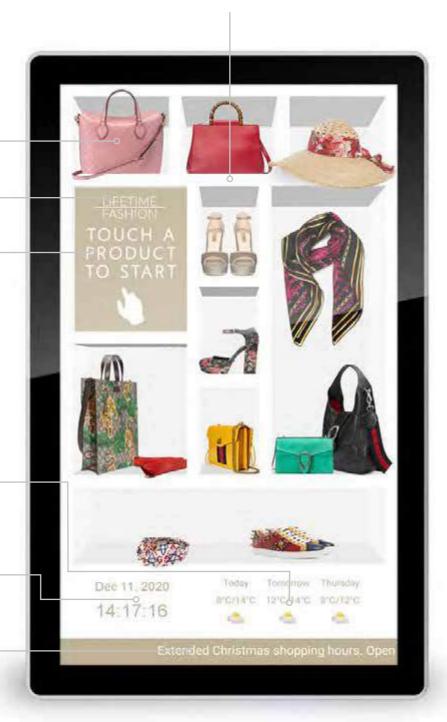



Webpages

Incorporating websites and webpages into your Touch Screen content opens up a whole new world of opportunities. Any complicated functions that can't be achieved by using the standard tools of our CMS can be achieved by creating a webpage. Interact with your company website, your social media feeds, online maps, HTML 5 elements and much more.

Videos

Set your videos to play automatically or assign a 'play' button to have them play on command. You can even assign multiple buttons to play different videos on the same page, allowing you to create a video gallery.



Insert your images into this zone and set the duration time and transition effect to display your images like a slideshow.

Media Galleries


Create user friendly galleries of your image and video content. Personalise your carousel with the length of each slide and the transition affect.

Screensavers

You can set a 'timeout' period for your content; if the screen isn't touched during this period you can assign a separate playlist to display automatically. This can include images, videos, webpages and even RSS feeds.

Apps

If you have an Android compatible app that you would like to use you can integrate it into your Touch Screen content. It can then be launched within the playlist with the touch of a button.

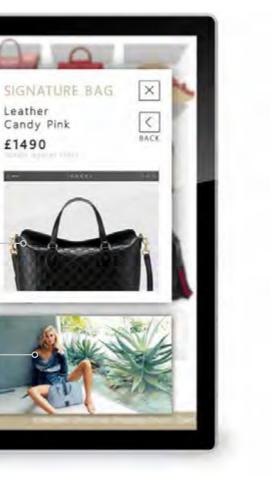

Easy To Use

With our intuitive CMS you can send content from your PC to your display or media player in a matter of seconds using a userfriendly drag-and-drop system.



Flexible and Scalable/ Deploy Globally

Using a wide range of screens and media players you can scale any project with absolute confidence. You can even integrate and interactive with existing websites.



Fully Customisable Content

Select exact colours from the palette or a HEX code to modify the backgrounds, scrolling text, static text, time, date and weather. You can also choose from 24 different transition styles between images.

- + Fonts
- + Colours
- + Logos
- + Backgrounds



Image/Video Galleries

Create image and video slideshows that automatically rotate or interactive galleries for your media.



Full Integrated Solution

Our CMS software has been specifically designed to be used with the screens and media players that we manufacture; providing an all-in-one integrated solution.



Integrate Android Apps

Incorporate existing Android apps into your content for ultimate flexibility. If you want to use your touch screen to run an existing app then you can use the Touch Screen CMS as a front end to launch the app as well as providing remote updates, management and monitoring of the connectivity.

Third Party APKs

Action Buttons

Create buttons to activate a host of actions including jumping to another page, launching a full screen webpage, launching a full screen Android application, or assigning a 'play' button for a video or image.




Widgets

Alongside your media zones you can display the local time and date, various styles of weather forecasts, any interactive social media feed and even live traffic updates.



User Management

Create and manage as many user accounts as you like, even customise the privileges for each user based on what screens you want them to have access to and what features of the CMS are unlocked.



Reports and Logs

View and export records of user activity as well as communication between hardware and the CMS server. You can also check which screens are currently online and offline.



Screensavers

Create a non-interactive playlist and set it to display after a given period of screen inactivity. You can even schedule separate screensavers to play during different periods.



Compatible Products

Our versatile and user-friendly Touch Content Management System is available on a wide range of touch screens, providing an integrated all-inone solution, as well as media players so that existing touch screens can be updated and managed using the same software.

PCAP Touch Screens with Dual OS	Pg 67	PCAP Touch Screens Mirror with Dual OS	_{pg} 67
POS PCAP Touch Screens	Pg 83	Cloud Network Media Players	pg 111

Secure Cloud Based Software

No need to install any software or have your own dedicated server, our cloud-based CMS portal can be accessed from anywhere in the world and gives you free unlimited storage space.



Remote Commands

Send commands to reboot, format the internal memory, stop and start content, adjust the volume and even take a screenshot of what is playing. Retain full control of your screens from anywhere in the world.



Integrate Interactive Webpages

The possibilities of interactivity are endless by adding webpages to your layouts. Incorporate existing websites to add data capture forms or e-commerce platforms so that in-store purchases can be made.







www.kuipertech.co.uk | 0330 058 4684 | contactus@kuipertech.co.uk